Address: LOT 485 RANDELL RD HINDMARSH ISLAND SA 5214

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Zone

Rural Living

Overlay

Hazards (Bushfire - High Risk)

Hazards (Flooding - Evidence Required)

Murray-Darling Basin Native Vegetation Ramsar Wetlands

Local Variation (TNV)

Minimum Site Area (Minimum site area is 2 ha)

Development Pathways

Rural Living

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Air handling unit, air conditioning system or exhaust fan
- · Building alterations
- Building work on railway land
- Carport
- Outbuilding
- Partial demolition of a building or structure
- Private bushfire shelter
- Shade sai
- Solar photovoltaic panels (roof mounted)
- Swimming pool or spa pool and associated swimming pool safety features
- · Temporary public service depot
- Verandah

2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Carport
- Deck
- Outbuilding
- Temporary accommodation in an area affected by bushfire
- Verandah

${\it 3. \,\, Code \,\, Assessed \,\, - \,\, Performance \,\, Assessed}$

Performance Assessed development types listed below are those for which the Code identifies relevant policies.

Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information.

Advertisement

- · Ancillary accommodation
- Carport
- Deck
- Demolition
- Detached dwelling
- Dwelling addition
- Fence
- Land division
- Outbuilding
- Retaining wall
- Tree-damaging activity
- Verandah

4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Part 2 - Zones and Sub Zones

Rural Living Zone

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
	A spacious and secluded residential lifestyle within semi-rural or semi-natural environments, providing opportunities for a range of low-intensity rural activities and home-based business activities that complement that lifestyle choice.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use	and Intensity
P0 1.1	DTS/DPF 1.1
Residential development with complementary ancillary non-residential uses that do not place additional demands on services and infrastructure, and compatible with a secluded semi-rural or semi-natural residential character.	Development comprises one or more of the following: (a) Agricultural Buildings (b) Animal Keeping (c) Carport (d) Consulting room (e) Detached dwelling (f) Dwelling addition (g) Farming (h) Horse keeping (i) Kennel (j) Light industry (k) Office (l) Outbuilding (m) Shelter/Stable (n) Shop (o) Verandah
P0 1.2	DTS/DPF 1.2

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Animal keeping and horse keeping is of a scale that is ancillary to and in association with the residential use of the land.	The keeping of animals:
	(a) is ancillary to a dwelling located on the same allotment(b) takes place on an allotment with an area of at least 1ha(c) for horse keeping, is limited to not more than 2 horses per allotment.
PO 1.3	DTS/DPF 1.3
Horse keeping is undertaken only if the horses are accommodated within a stable or shelter with supplementary feeding to maintain pasture cover.	Horse keeping includes the provision of:
	(a) stabling or similar sheltering(b) a grazing area of at least 0.5ha.
PO 1.4	DTS/DPF 1.4
Non-residential development complements the semi-rural or semi-natural residential character and amenity and:	Non-residential business activities located on the same allotment and in conjunction with a dwelling where one of the following is satisfied:
 (a) is ancillary to a dwelling erected on the same allotment (b) avoids interface conflicts with other land uses. 	(a) shop, consulting room or office (or any combination thereof) where all the following are satisfied: (i) does not exceed 50m² gross leasable floor area (ii) does not involve the display of goods in a window or about the dwelling or its curtilage
	(b) light industry where the combined (exiting and proposed) total floor area on the allotment used for such purposes does not exceed 100m ² .
PO 1.5	DTS/DPF 1.5
Non-residential development sited and designed to complement the semi- rural or semi-natural residential character and amenity.	None are applicable.
Built Form:	and Character
PO 2.1	DTS/DPF 2.1
Dwellings are sufficiently separated from site boundaries and of a scale that reinforces the semi-rural or semi-natural character and amenity.	Dwellings: (a) are setback as follows: (i) for allotments with an area of 1ha or more - at least 20m from all boundaries (ii) for allotments with an area less than 1ha: A. 20m from the primary street and rear boundaries B. 10m from side and secondary street boundaries (b) have a building height that is no greater than 2 building levels and 9m (c) have a wall height is no greater than 6m.
P0 2.2	DTS/DPF 2.2
Non-residential buildings are designed and sited to minimise visual impact on the surrounding locality by: (a) having substantial setbacks from boundaries and adjacent public roads (b) using low-reflective materials and finishes that blend with the surrounding landscape (c) being located below ridgelines.	Non-residential buildings and structures: (a) do not exceed 100m² in total floor area (b) are set back from all allotment boundaries by at least 25m (c) if clad in sheet metal, it is pre-colour treated or painted in a non-reflective colour (d) have a building height that is no greater than 1 building level and 6m (e) have a wall height is no greater than 3m.
PO 2.3	DTS/DPF 2.3
Buildings, structures and associated facilities for the keeping of animals are sited, designed and of a scale and appearance that reinforces the semi-rural or semi-natural character and amenity.	Kennels, stables, shelters and associated yards: (a) are set back from all allotment boundaries by at least 25m (b) have a building height that is no greater than 5m above natural ground level (c) do not exceed a combined total floor area of 100m ² (d) do not comprise more than 10% of the area of the allotment.
P0 2.4	DTS/DPF 2.4
Dwelling additions are sited, designed and of a scale that reinforces the semi-	Additions or alterations to an existing dwelling:

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
•	1 ab code (iii chicot) version 2024.1 10/04/202
rural or semi-natural character and amenity.	(-) are ask health abind the manin forced of the aviation divalling
	(a) are set back behind the main façade of the existing dwelling(b) have a building height that is no greater than 2 building levels and 9m
	(c) have a wall height no greater than 6m.
	(b) Have a wan height no greater than one.
P0 2.5	DTS/DPF 2.5
Outbuildings and agricultural buildings are sited, designed and of a scale that reinforces the semi-rural or semi-natural character and amenity.	Outbuildings and agricultural buildings:
	(a) have a primary street setback that is behind the building to which it is ancillary
	(b) have a combined total floor area that does not exceed:
	(i) for allotment with an area of 1ha or more - 200m ²
	(ii) for allotment with an area less than 1ha - 150m ²
	(c) do not exceed 4m in wall height measured from natural ground level (not including a gable end)
	(d) have a total roof height that does not exceed 5m
	(e) if clad in sheet metal, it is pre-colour treated or painted in a non-reflective colour
	(f) are limited to no more than a combination of 2 outbuildings and/or agricultural buildings on the same allotment.
P0 2.6	DTS/DPF 2.6
Carports and verandahs are sited, designed and of a scale that reinforces the semi-rural or semi-natural character and amenity.	Carports and verandahs:
·	(a) are set back from the primary street at least as far back as the building to which it is ancillary
	(b) have a total floor area that does not exceed 80m ²
	(c) have a post height that does not exceed 3m measured from natural ground level (not including a gable end)
	(d) have a total roof height that does not exceed 5m
	(e) if clad in sheet metal, the cladding is pre-colour treated or painted in a non-reflective colour.
Site Dimensions	and Land Division
PO 3.1	DTS/DPF 3.1
Allotments/sites created for semi-rural residential purposes are consistent with the density expressed in any relevant <i>Minimum Site Area Technical and</i>	Development will not result in more than 1 dwelling on an existing allotment
Numeric Variation or are of suitable size and dimension to contribute to the	or
existing semi-rural pattern of development consistent to the locality and suitable for their intended use.	Allotments/sites have:
	(a) an area not less than:
	Minimum Site Area
	Minimum site area is 2 ha
	(b) a frontage to a public road not less than 50m or, in the case of a battle-axe allotment, a frontage to a public road not less than 6m and a maximum driveway 'handle' length of no more than 40m.

a maximum driveway 'handle' length of no more than 40m.

In relation to DTS/DPF 3.1, in instances where:

- (c) more than one value is returned in the same field, refer to the Minimum Site Area Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development
- (d) no value is returned for DTS/DPF 3.1(a) (i.e. there is a blank field), then none are applicable and the relevant development cannot be classified as deemed-to-satisfy.

Concept Plans

PO 4.1

Development is compatible with the outcomes sought by any relevant Concept Plan contained within Part 12 - Concept Plans of the Planning and Design Code to support the orderly development of land through staging of development and provision of infrastructure.

DTS/DPF 4.1

The site of the development is wholly located outside any relevant Concept Plan boundary. The following Concept Plans are relevant:

In relation to DTS/DPF 4.1, in instances where:

one or more Concept Plan is returned, refer to Part 12 - Concept

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	Plans in the Planning and Design Code to determine if a Concept Plan is relevant to the site of the proposed development. Note: multiple concept plans may be relevant. (b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 4.1 is met.
Advert	isements
PO 5.1	DTS/DPF 5.1
Advertisements identify the associated business activity, and do not detract from the residential character of the locality.	Advertisements relating to a lawful business activity associated with a residential use do not exceed 0.3m2 and mounted flush with a wall or fence.

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

Notification tables exclude the classes of development listed in Column A from notification provided that they do not fall within a corresponding exclusion prescribed in Column B.

Where a development or an element of a development falls within more than one class of development listed in Column A, it will be excluded from notification if it is excluded (in its entirety) under any of those classes of development. It need not be excluded under all applicable classes of development.

Where a development involves multiple performance assessed elements, all performance assessed elements will require notification (regardless of whether one or more elements are excluded in the applicable notification table) unless every performance assessed element of the application is excluded in the applicable notification table, in which case the application will not require notification.

A relevant authority may determine that a variation to 1 or more corresponding exclusions prescribed in Column B is minor in nature and does not require notification.

Class	of Development	Exceptions
(Colun	nn A)	(Column B)
1.	Development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development.	None specified.
2.	Any development involving any of the following (or of any combination of any of the following): (a) agricultural building (b) ancillary accommodation (c) detached dwelling (d) dwelling addition (e) protective tree netting structure (f) temporary public service depot.	Except development that exceeds the maximum building height specified in Rural Living Zone DTS/DPF 2.1(b).
3.	Any development involving any of the following (or of any combination of any of the following): (a) air handling unit, air conditioning system or exhaust fan (b) carport (c) deck (d) farming (e) fence (f) internal building works (g) land division (h) outbuilding (i) pergola (j) private bushfire shelter (k) replacement building (l) retaining wall (m) shade sail (n) solar photovoltaic panels (roof mounted) (o) swimming pool or spa pool and associated swimming pool safety features (p) temporary accommodation in an area affected by	None specified.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
bushfire (q) tree damaging activity (r) verandah (s) water tank.	
4. Any development involving any of the following (or of any combination of any of the following): (a) consulting room (b) office (c) shop.	Except development that exceeds the maximum building height specified in Rural Living Zone DTS/DPF 2.1(b) or does not satisfy Rural Living Zone DTS/DPF 1.4.
5. Demolition.	 Except any of the following: the demolition (or partial demolition) of a State or Local Heritage Place (other than an excluded building) the demolition (or partial demolition) of a building in a Historic Area Overlay (other than an excluded building).
6. Dog kennelling within the Animal Husbandry Subzone.	Except dog kennelling that does not satisfy Animal Husbandry Subzone DTS/DPF 1.2.
 7. Horse keeping not within any of the following subzones: (a) Animal Husbandry Subzone (b) Intensive Horse Establishments Subzone 	Except horse keeping that does not satisfy Rural Living Zone DTS/DPF 1.3.
8. Horse keeping within any of the following subzones: (a) Animal Husbandry Subzone (b) Intensive Horse Establishments Subzone.	None specified.
9. Railway line.	Except where located outside of a rail corridor or rail reserve.

Placement of Notices - Exemptions for Performance Assessed Development

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Hazards (Bushfire - High Risk) Overlay

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
DO 1	Development, including land division is sited and designed to minimise the threat and impact of bushfires on life and property with regard to	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024	
	the following risks:	
	(a) potential for uncontrolled bushfire events taking into account the increased frequency and intensity of bushfires as a result of climate change	
	(b) high levels and exposure to ember attack	
	(c) impact from burning debris	
	(d) radiant heat	
	(e) likelihood and direct exposure to flames from a fire front.	
DO 2	Activities that increase the number of people living and working in the area or where evacuation would be difficult is sited away from areas unacceptable bushfire risk.	
DO 3	To facilitate access for emergency service vehicles to aid the protection of lives and assets from bushfire danger.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Lan	d Use
P0 1.1	DTS/DPF 1.1
Development that significantly increases the potential for fire outbreak as a result of the spontaneous combustion of materials, spark generation or through the magnification and reflection of light is not located in areas of unacceptable bushfire risk.	None are applicable.
PO 1.2	DTS/DPF 1.2
Child care facilities, educational facilities, hospitals, retirement and supported accommodation are sited away from areas of unacceptable bushfire risk and locations that:	None are applicable.
are remote from or require extended periods of travel to reach safer locations don't have a safe path of travel to safer locations.	
don't have a safe pain of travel to safe focutions.	
	ting T
P0 2.1	DTS/DPF 2.1
Buildings and structures are located away from areas that pose an unacceptable bushfire risk as a result of vegetation cover and type, and terrain.	None are applicable.
Built	Form
PO 3.1	DTS/DPF 3.1
Buildings and structures are designed and configured to reduce the impact of bushfire through using designs that reduce the potential for trapping burning debris against or underneath the building or structure, or between the ground and building floor level in the case of transportable buildings and buildings on stilts.	None are applicable.
PO 3.2	DTS/DPF 3.2
Extensions to buildings, outbuildings and other ancillary structures are sited and constructed using materials to minimise the threat of fire spread to residential and tourist accommodation (including boarding houses, hostels, dormitory style accommodation, student accommodation and Workers' accommodation) in the event of bushfire.	Outbuildings and other ancillary structures are sited no closer than 6m from the habitable building.
Habitable	e Buildings
PO 4.1	DTS/DPF 4.1
To minimise the threat, impact and potential exposure to bushfires on life and	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
property, residential and tourist accommodation and habitable buildings for vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student accommodation and workers' accommodation) is sited on the flatter portion of allotments away from steep slopes.	
PO 4.2 Residential and tourist accommodation and habitable buildings for vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student accommodation and workers' accommodation) is sited away from vegetated areas that pose an unacceptable bushfire risk.	DTS/DPF 4.2 Residential and tourist accommodation and habitable buildings for vulnerable communities are provided with asset protection zone(s) in accordance with (a) and (b): (a) the asset protection zone has a minimum width of at least: (i) 50 metres to unmanaged grasslands (ii) 100 metres to hazardous bushland vegetation (b) the asset protection zone is contained wholly within the allotment of the development.
Po 4.3 Residential and tourist accommodation and habitable buildings for vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student accommodation and workers' accommodation) has a dedicated area available that: (a) is capable of accommodating a bushfire protection system comprising firefighting equipment and water supply in accordance with Ministerial Building Standard MBS 008 - Designated bushfire prone areas - additional requirements (b) includes the provision of an all-weather hardstand area in a location that: (i) allows fire-fighting vehicles to safely access the dedicated water supply and exit the site in a forward direction (ii) is no further than 6 metres from the dedicated water supply outlet(s) where required.	None are applicable.
Land I	Division
PO 5.1 Land division for residential and tourist accommodation and habitable buildings for vulnerable communities (including boarding houses, hostels, dormitory style accommodation, student accommodation and workers' accommodation) is limited to those areas specifically set aside for these uses.	DTS/DPF 5.1 None are applicable.
PO 5.2 Land division is designed and incorporates measures to minimise the danger of fire hazard to residents and occupants of buildings, and to protect buildings and property from physical damage in the event of a bushfire.	DTS/DPF 5.2 None are applicable.
P0 5.3 Land division is designed to provide a continuous street pattern (avoiding the use of dead end roads/cul-de-sac road design) to facilitate the safe movement and evacuation of emergency vehicles, residents, occupants and visitors. Where cul-de-sac / dead end roads are proposed, an alternative emergency evacuation route is provided.	DTS/DPF 5.3 None are applicable.
P0 5.4 Where 10 or more new allotments are proposed, land division includes at least two separate and safe exit points to enable multiple avenues of evacuation in the event of a bushfire.	DTS/DPF 5.4 None are applicable.
Po 5.5 Land division provides sufficient space for future asset protection zones and incorporates perimeter roads of adequate design in conjunction with bushfire buffer zones to achieve adequate separation between residential allotments and areas of unacceptable bushfire risk and to support safe access for the purposes of fire-fighting.	DTS/DPF 5.5 None are applicable.

Vehicle Access -Roads, Driveways and Fire Tracks

PO 6.1

Roads are designed and constructed to facilitate the safe and effective:

- access, operation and evacuation of fire-fighting vehicles and emergency personnel
- (b) evacuation of residents, occupants and visitors.

DTS/DPF 6.1

Roads:

- (a) are constructed with a formed, all-weather surface
- (b) have a gradient of not more than 16 degrees (1-in-3.5) at any point along the road
- (c) have a cross fall of not more than 6 degrees (1-in-9.5) at any point along the road
- (d) have a minimum formed road width of 6m
- provide overhead clearance of not less than 4.0m between the road surface and overhanging branches or other obstructions including buildings and/or structures (Figure 1)
- (f) allow fire-fighting services (personnel and vehicles) to travel in a continuous forward movement around road curves by constructing the curves with a minimum external radius of 12.5m (Figure 2)
- (9) incorporating cul-de-sac endings or dead end roads are provided within an alternative evacuation route and do not exceed 200m in length and the end of the road has either:
 - (i) a turning area with a minimum formed surface radius of 12.5m (Figure 3)
 - (ii) a 'T' or 'Y' shaped turning area with a minimum formed surface length of 11m and minimum internal radii of 9.5m (Figure 4)
- incorporate solid, all-weather crossings over any watercourse that support fire-fighting vehicles with a gross vehicle mass (GVM) of 21 tonnes.

PO 6.2

Access to habitable buildings is designed and constructed to facilitate the safe and effective:

- (a) use, operation and evacuation of fire-fighting and emergency personnel
- (b) evacuation of residents, occupants and visitors.

DTS/DPF 6.2

Access is in accordance with (a) or (b):

- (a) a clear and unobstructed vehicle or pedestrian pathway of not greater than 60 metres in length is available between the most distant part of the habitable building and the nearest part of a formed public access road
- (b) driveways:
 - (i) do not exceed 600m in length
 - (ii) are constructed with a formed, all-weather surface
 - (iii) are connected to a formed, all-weather public road with the transition area between the road and driveway having a gradient of not more than 7 degrees (1-in-8)
 - (iv) have a gradient of not more than 16 degrees (1-in-3.5) at any point along the driveway
 - (v) have a crossfall of not more than 6 degrees (1-in-9.5) at any point along the driveway
 - (vi) have a minimum formed width of 3m (4m where the gradient of the driveway is steeper than 12 degrees (1-in-4.5)) plus 0.5 metres clearance either side of the driveway from overhanging branches or other obstructions, including buildings and/or structures (Figure 1)
 - (vii) incorporate passing bays with a minimum width of 6m and length of 17m every 200m (Figure 5)
 - (viii) provide overhead clearance of not less than 4.0m between the driveway surface and overhanging branches or other obstructions, including buildings and/or structures (Figure 1)
 - (ix) allow fire-fighting services (personnel and vehicles) to travel in a continuous forward movement around driveway curves by constructing the curves with a minimum external radius of 12.5m (Figure 2)
 - (x) allow fire-fighting vehicles to safely enter and exit an allotment in a forward direction by using a 'U' shaped drive through design or by incorporating at the end of the driveway either:
 - A. a loop road around the building
 - B. a turning area with a minimum radius of 12.5m (Figure 3) or

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	C. a 'T' or 'Y' shaped turning area with a minimum formed length of 11m and minimum internal radii of 9.5m (Figure 4)
	(xi) incorporate solid, all-weather crossings over any watercourse that support fire-fighting vehicles with a gross vehicle mass (GVM) of 21 tonnes.
PO 6.3	DTS/DPF 6.3
Development does not rely on fire tracks as means of evacuation or access for fire-fighting purposes unless there are no safe alternatives available.	None are applicable.


Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except if a relevant certificate accompanies the application for planning consent in respect of the development, any of the following classes of development (including alterations and additions which increase the floor area of such buildings by 10% or more): (a) land division creating one or more additional allotments (b) dwelling (c) ancillary accommodation (d) residential flat building (e) tourist accommodation (f) boarding home (g) dormitory style accommodation (h) workers' accommodation (i) student accommodation (i) child care facility (k) educational facility (l) retirement village (m) supported accommodation (n) residential park (o) hospital (p) camp ground.	South Australian Country Fire Service.	To provide expert assessment and direction to the relevant authority on the potential impacts of bushfire on the development.	Development of a class to which Schedule 9 clause 3 item 2 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Figures and Diagrams

Fire Appliance Clearances	
Figure 1 - Overhead and Side Clearances	

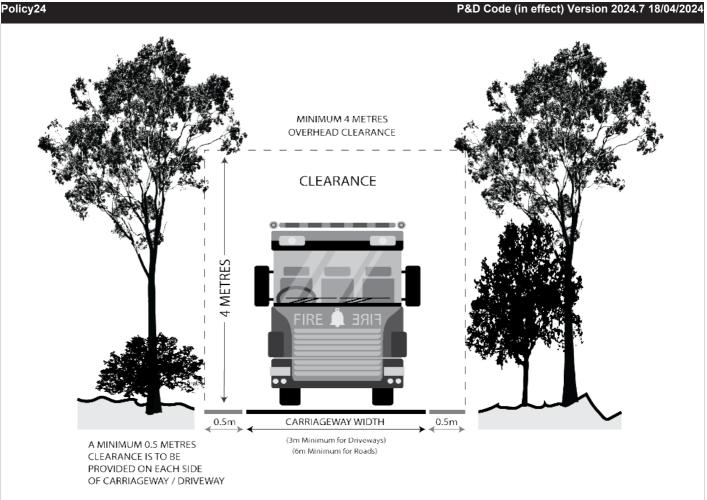

Roads and Driveway Design

Figure 2 - Road and Driveway Curves

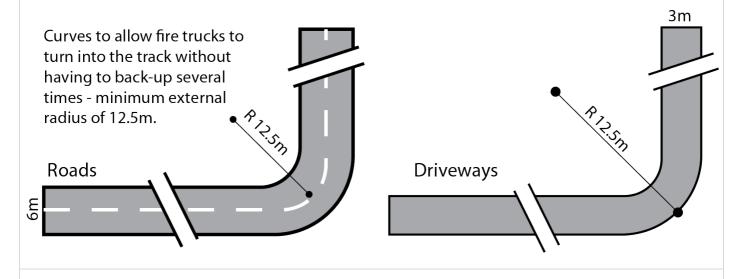


Figure 3 - Full Circle Turning Area


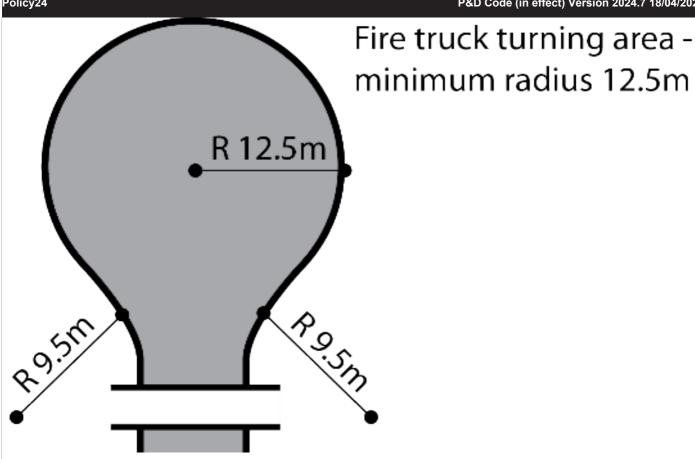


Figure 4 - 'T' or 'Y' Shaped Turning Head

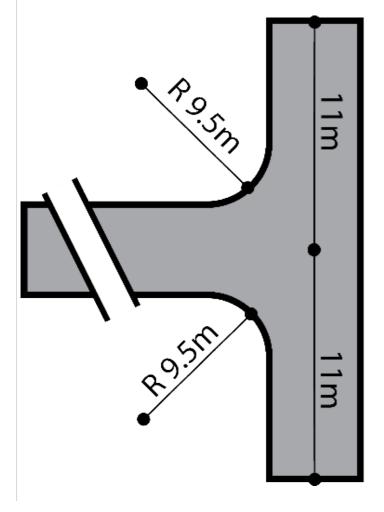


"T" shaped turning area for fire trucks to reverse into so they can turn around

- minimum length 11m.

Figure 5 - Driveway Passing Bays

Passing bay for fire trucks - minimum width 6 metres, minimum length 17 metres.

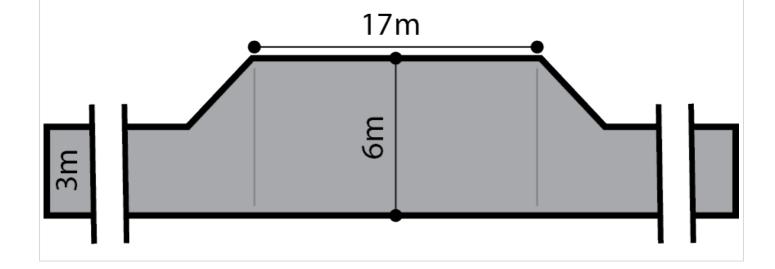

Hazards (Flooding - Evidence Required) Overlay

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome Development adopts a precautionary approach to mitigate potential impacts on people, property, infrastructure and the environment from potential flood risk through the appropriate siting and design of development.

Performance Outcomes (P0) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Flood F	esilience
P0 1.1	DTS/DPF 1.1
Development is sited, designed and constructed to minimise the risk of entry of potential floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished floor level at least 300mm above: (a) the highest point of top of kerb of the primary street or (b) the highest point of natural ground level at the primary street
	boundary where there is no kerb
Environmen	tal Protection
PO 2.1	DTS/DPF 2.1
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building.	Development does not involve the storage of hazardous materials.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Murray-Darling Basin Overlay

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
DO 1	Sustainable water use in the Murray-Darling Basin area.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
P0 1.1	DTS/DPF 1.1
All development, but in particular development involving:	Development satisfies either of the following:
(a) horticulture	(a) the applicant has a current water licence in which sufficient spare

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
(b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) horse keeping (g) commercial forestry	capacity exists to accommodate the water needs of the proposed use or (b) the proposal does not involve the taking of water for which a licence would be required under the Landscape South Australia Act 2019.
has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in the Murray-Darling Basin.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require, or may require water to be taken from the River Murray within the meaning of the River Murray Act 2003 under a water licence required in addition to any allocation that has already been granted under the Landscape South Australia Act 2019: (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) horse keeping (g) commercial forestry.	Minister responsible for the administration of the <i>River Murray</i> Act 2003.	To provide expert technical assessment and direction to the relevant authority on matters regarding the taking of water, to ensure development is undertaken sustainably in the Murray-Darling Basin.	Development of a class to which Schedule 9 clause 3 item 10 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Native Vegetation Overlay

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
DO 1	Areas of native vegetation are protected, retained and restored in order to sustain biodiversity, threatened species and vegetation communities, fauna habitat, ecosystem services, carbon storage and amenity values.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Environmen	tal Protection
P0 1.1	DTS/DPF 1.1
Development avoids, or where it cannot be practically avoided, minimises the clearance of native vegetation taking into account the siting of buildings, access points, bushfire protection measures and building maintenance.	An application is accompanied by: (a) a declaration stating that the proposal will not, or would not, involve clearance of native vegetation under the Native Vegetation Act 1991, including any clearance that may occur:

olicy24 P&D Code (in effect) Version 2024.7 18/04/2024 (i) in connection with a relevant access point and / or driveway (ii) within 10m of a building (other than a residential building or tourist accommodation) within 20m of a dwelling or addition to an existing dwelling for fire prevention and control (iv) within 50m of residential or tourist accommodation in connection with a requirement under a relevant overlay to establish an asset protection zone in a bushfire prone area (b) a report prepared in accordance with Regulation 18(2)(a) of the Native Vegetation Regulations 2017 that establishes that the clearance is categorised as 'Level 1 clearance'. PO 1.2 DTS/DPF 1.2 Native vegetation clearance in association with development avoids the None are applicable. following: (a) significant wildlife habitat and movement corridors (b) rare, vulnerable or endangered plants species native vegetation that is significant because it is located in an area which has been extensively cleared native vegetation that is growing in, or in association with, a wetland environment PO 1.3 DTS/DPF 1.3 Intensive animal husbandry, commercial forestry and agricultural activities are Development within 500 metres of a boundary of a State Significant Native sited, set back and designed to minimise impacts on native vegetation, Vegetation Area does not involve any of the following: including impacts on native vegetation in an adjacent State Significant Native (a) horticulture Vegetation Area, from: (b) intensive animal husbandry (a) in the case of commercial forestry, the spread of fires from a (c) dairy plantation (d) commercial forestry (b) the spread of pest plants and phytophthora (e) aquaculture. (c) the spread of non-indigenous plants species excessive nutrient loading of the soil or loading arising from surface water runoff soil compaction (f) chemical spray drift. PO 1.4 DTS/DPF 1.4 Development restores and enhances biodiversity and habitat values through None are applicable. revegetation using locally indigenous plant species. Land division DTS/DPF 2.1 PO 2.1 Land division where: Land division does not result in the fragmentation of land containing native vegetation, or necessitate the clearance of native vegetation, unless such clearance is considered minor, taking into account the location of allotment (a) an application is accompanied by one of the following: boundaries, access ways, fire breaks, boundary fencing and potential building (i) a declaration stating that none of the allotments in the proposed plan of division contain native vegetation under the siting or the like. Native Vegetation Act 1991 (ii) a declaration stating that no native vegetation clearance under the Native Vegetation Act 1991 will be required as a result of the division of land (iii) a report prepared in accordance with Regulation 18(2)(a) of the Native Vegetation Regulations 2017 that establishes that the vegetation to be cleared is categorised as 'Level 1 clearance (b) an application for land division which is being considered concurrently with a proposal to develop each allotment which will satisfy, or would satisfy, the requirements of DTS/DPF 1.1, including any clearance that may occur the division is to support a Heritage Agreement under the Native Vegetation Act 1991 or the Heritage Places Act 1993.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Development that is the subject of a report prepared in accordance with Regulation 18(2)(a) of the <i>Native Vegetation Regulations 2017</i> that categorises the clearance, or potential clearance, as 'Level 3 clearance' or 'Level 4 clearance'.	Native Vegetation Council	To provide expert assessment and direction to the relevant authority on the potential impacts of development on native vegetation.	Development of a class to which Schedule 9 clause 3 item 11 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Ramsar Wetlands Overlay

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
DO 1	Protection and restoration of Ramsar wetlands.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ger	neral
P0 1.1	DTS/DPF 1.1
Development provides for the restoration and/or sustainable management of wetlands habitat.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development does not lead to significant negative impacts on Ramsar wetland habitat and its carbon capture and storage potential.	None are applicable.
PO 1.3	DTS/DPF 1.3
Development adjacent to Ramsar wetlands maintains or establishes landform and vegetated corridor links between Ramsar areas where possible.	None are applicable.
PO 1.4	DTS/DPF 1.4
Development is not detrimental to the hydrological regime of Ramsar wetlands taking into account the effects of climate change on rainfall and air	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
temperature, including:	
(a) a change in volume, timing, duration and frequency of ground and surface water flows to and within the wetland	
(b) a change in the level of salinity, pollutants, nutrients or water temperature.	
PO 1.5	DTS/DPF 1.5
Development is designed to minimise the cumulative impacts on Ramsar wetlands from jetties, vegetation clearance and dredging.	None are applicable.
PO 1.6	DTS/DPF 1.6
Development does not result in the disruption of the breeding, feeding, migration or resting behaviour of an ecologically significant proportion of the population of a migratory or resident species.	None are applicable.
Land Division	
PO 2.1	DTS/DPF 2.1
Land division supports the management or improvement of the natural environment and does not result in any additional allotments within a Ramsar wetland.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class	of Development / Activity	Referral Body	•	Statutory Reference
None		None	None	None

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Appea	arance

Policy24	P&D Code (in effect) Version 2024.7 18/04/202
P0 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following: (a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above parapet height B. are not attached to the roof of the building
	(c) where they are not flush with a wall: (i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (ii) if attached to a two-storey building: A. has no part located above the finished floor level of the second storey of the building B. does not protrude beyond the outer limits of any verandah structure below C. does not have a sign face that exceeds 1m2 per side.
	(d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy: (i) are flush with a wall (ii) do not have any part rising above parapet height (iii) are not attached to the roof of the building. (g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (h) if attached to a two-storey building, have no part located above the
	finished floor level of the second storey of the building (i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which they are attached.
P0 1.2 Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	DTS/DPF 1.2 Where development comprises an advertising hoarding, the supporting structure is: (a) concealed by the associated advertisement and decorative detailing or (b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.
PO 1.3 Advertising does not encroach on public land or the land of an adjacent allotment.	DTS/DPF 1.3 Advertisements and/or advertising hoardings are contained within the boundaries of the site.
PO 1.4 Where possible, advertisements on public land are integrated with existing structures and infrastructure.	DTS/DPF 1.4 Advertisements on public land that meet at least one of the following: (a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.
PO 1.5 Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	DTS/DPF 1.5 None are applicable.
Proliferation of	f Advertisements
PO 2.1 Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	DTS/DPF 2.1 No more than one freestanding advertisement is displayed per occupancy.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
P0 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
P0 2.3	DTS/DPF 2.3
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:
	 (a) are attached to a building (b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they are attached (c) do not result in more than one sign per occupancy that is not flush with a wall.
Advertisi	ng Content
PO 3.1	DTS/DPF 3.1
Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.
Amenity	Impacts
PO 4.1	DTS/DPF 4.1
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.
Sa	l fety
PO 5.1	DTS/DPF 5.1
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.
PO 5.2	DTS/DPF 5.2
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.
PO 5.3	DTS/DPF 5.3
Advertisements and/or advertising hoardings do not create a hazard to drivers by:	Advertisements satisfy all of the following:
 (a) being liable to interpretation by drivers as an official traffic sign or signal (b) obscuring or impairing drivers' view of official traffic signs or signals (c) obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings. 	(a) are not located in a public road or rail reserve (b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram Corner Cut-Off Area Allotment Boundary Off Area
PO 5.4 Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the	DTS/DPF 5.4 Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
demands on driver concentration are high.	
PO 5.5	DTS/DPF 5.5
Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	(a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb
	(b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal: (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
PO 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Animal Keeping and Horse Keeping

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	d Design
PO 1.1	DTS/DPF 1.1
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2
Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.
Horse	Keeping
P0 2.1	DTS/DPF 2.1
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	None are applicable.
P0 2.2	DTS/DPF 2.2
Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
PO 2.3	DTS/DPF 2.3
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.
PO 2.4	DTS/DPF 2.4
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.
PO 2.5	DTS/DPF 2.5
Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).
Ker	nnels
P0 3.1	DTS/DPF 3.1
Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	The floors of kennels satisfy all of the following: (a) are constructed of impervious concrete (b) are designed to be self-draining when washed down.
P0 3.2	DTS/DPF 3.2
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as:	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.
adopting appropriate separation distances b orientating openings away from sensitive receivers.	
PO 3.3	DTS/DPF 3.3
Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.
Wastes	
PO 4.1	DTS/DPF 4.1
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.	Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.

Aquaculture

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
	Aquaculture
P0 1.1	DTS/DPF 1.1
Land-based aquaculture and associated components are sited and designed to mitigate adverse impacts on nearby sensitive receivers.	Land-based aquaculture and associated components are located to satisfy all of the following:
	(a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to accommodate sensitive receivers
	or
	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
P0 1.2	DTS/DPF 1.2
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.
PO 1.3	DTS/DPF 1.3
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
PO 1.4	DTS/DPF 1.4
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
PO 1.5	DTS/DPF 1.5
Land-based aquaculture and associated components, including intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	None are applicable.
PO 1.6	DTS/DPF 1.6
Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
PO 1.7	DTS/DPF 1.7
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment.	None are applicable.
Marine Base	d Aquaculture
PO 2.1	DTS/DPF 2.1
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including:	None are applicable.
(a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems.	
PO 2.2	DTS/DPF 2.2
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on	The development does not include toilet facilities located over water.

Policy2	24	P&D Code (in effect) Version 2024.7 18/04/2024
the site	on any adjacent land or into nearby waters.	
PO 2.4		DTS/DPF 2.4
	aquaculture (other than inter-tidal aquaculture) is located an riate distance seaward of the high water mark.	Marine aquaculture development is located 100m or more seaward of the high water mark
		or
		The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
PO 2.5		DTS/DPF 2.5
Marine	aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
(a)	areas of high public use	
(b)	areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports	
(c)	areas of outstanding visual or environmental value	
(d)	areas of high tourism value	
(e)	areas of important regional or state economic activity, including commercial ports, wharfs and jetties	
(f)	the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.	
PO 2.6		DTS/DPF 2.6
	aquaculture is sited and designed to minimise interference and tion to the natural processes of the coastal and marine environment.	None are applicable.
PO 2.7		DTS/DPF 2.7
	aquaculture is designed to be as unobtrusive as practicable by rating measures such as:	None are applicable.
(a)		
(4)	using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water	
(b)	positioning structures to protrude the minimum distance practicable above the surface of the water	
(c)	avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock	
(d)	inside the cages, or for safety reasons positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	
PO 2.8		DTS/DPF 2.8
Access	, launching and maintenance facilities utilise existing established roads,	The development utilises existing established roads, tracks, ramps and/or
tracks,	ramps and paths to or from the sea where possible to minimise mental and amenity impacts.	paths (as applicable) to access the sea.
PO 2.9		DTS/DPF 2.9
	launching and maintenance facilities are developed as common user s and are co-located where practicable to mitigate adverse impacts on areas.	The development utilises existing established roads, tracks, ramps and/or paths (as applicable) to access the sea.
PO 2.10		DTS/DPF 2.10
	aquaculture is sited to minimise potential impacts on, and to protect grity of, reserves under the <i>National Parks and Wildlife Act 1972</i> .	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act 1972</i> .
PO 2.11		DTS/DPF 2.11
	e storage, cooling and processing facilities do not impair the coastline visual amenity by:	The development does not include any onshore facilities in conjunction with a proposal for marine aquaculture.
(a)	being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal landscape	
(b)	making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access	

Policy24 P&D Code (in effect) Version 2024.7 18/04/20	
arrangements as far as practicable (c) incorporating appropriate waste treatment and disposal.	
Navigation	and Safety
PO 3.1	DTS/DPF 3.1
Marine aquaculture sites are suitably marked to maintain navigational safety.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the Aquaculture Act 2001.
PO 3.2	DTS/DPF 3.2
Marine aquaculture is sited to provide adequate separation between farms for safe navigation.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .
Environmenta	l Management
PO 4.1	DTS/DPF 4.1
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.	None are applicable.
PO 4.2	DTS/DPF 4.2
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.	None are applicable.
PO 4.3	DTS/DPF 4.3
Marine aquaculture provides for progressive or future reclamation of disturbed areas ahead of, or upon, decommissioning.	None are applicable.
PO 4.4	DTS/DPF 4.4
Aquaculture operations incorporate measures for the removal and disposal of litter, disused material, shells, debris, detritus, dead animals and animal waste to prevent pollution of waters, wetlands, or the nearby coastline.	The development is the subject of an aquaculture lease and/or licence (as applicable) granted under the <i>Aquaculture Act 2001</i> .

Beverage Production in Rural Areas

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Odour and Noise		
P0 1.1	DTS/DPF 1.1	
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
P0 1.2	DTS/DPF 1.2
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.
PO 1.4	DTS/DPF 1.4
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.
PO 1.5	DTS/DPF 1.5
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.
Water	Quality
PO 2.1	DTS/DPF 2.1
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.
PO 2.2	DTS/DPF 2.2
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	None are applicable.
PO 2.3	DTS/DPF 2.3
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.
PO 2.4	DTS/DPF 2.4
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.
Wastewate	er Irrigation
P0 3.1	DTS/DPF 3.1
Beverage production wastewater irrigation systems are designed and located to not contaminate soil and surface and ground water resources or damage crops.	None are applicable.
PO 3.2	DTS/DPF 3.2
Beverage production wastewater irrigation systems are designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.
PO 3.3	DTS/DPF 3.3
Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as:	None are applicable.
(a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore (c) land subject to flooding (d) steeply sloping land (e) rocky or highly permeable soil overlaying an unconfined aquifer.	

Bulk Handling and Storage Facilities

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome
Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting a	nd Design
P0 1.1	DTS/DPF 1.1
Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers.	Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers:
	 (a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility (b) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility (c) bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more (d) coal handling with: a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more.
Buffers and	I Landscaping
P0 2.1	DTS/DPF 2.1
Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares.	None are applicable.
P0 2.2	DTS/DPF 2.2
Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.	None are applicable.
Access a	and Parking
P0 3.1	DTS/DPF 3.1
Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.	Roadways and vehicle parking areas are sealed with an all-weather surface.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Slipways, Whan	ves and Pontoons
PO 4.1	DTS/DPF 4.1
Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.	1

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the Electricity Act 1996 there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
DO 1	Development is:	
	(a) contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area	
	(b) durable - fit for purpose, adaptable and long lasting	
	(c) inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
	(d) sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome	Deemed-to-Satisfy Criteria /	
	Designated Performance Feature	
All development		
External A	ppearance	
P0 1.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.	
P0 1.4	DTS/DPF 1.4	
Plant, exhaust and intake vents and other technical equipment is integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.	
positioning plant and equipment in unobtrusive locations viewed from public roads and spaces screening rooftop plant and equipment from view when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses.		
PO 1.5	DTS/DPF 1.5	
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone.	None are applicable.	
Sa	fety	
PO 2.1	DTS/DPF 2.1	
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.	
P0 2.2	DTS/DPF 2.2	
Development is designed to differentiate public, communal and private areas.	None are applicable.	
P0 2.3	DTS/DPF 2.3	
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.	
P0 2.4	DTS/DPF 2.4	
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.	
P0 2.5	DTS/DPF 2.5	
Common areas and entry points of buildings (such as the foyer areas of residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.	

Solution Investigation I	Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Vehicle parking areas are appropriately located, designed and constructed to minimize impacts on adjacent sensitive receivers frough measures such as ensuring they are attractively developed and landscapeds, screen fenced and the like. 75.73 75.74 75.75 75.76 75.76 75.76 75.76 75.77 75.76 75.76 75.76 75.77 75.76 75.	ggggg	
minimiser impacts on adjacent sensitive receivers through measures such as estuaring they are attractively developed and landscaped, screen fenced and the like. PO 72 STATE TO THE PROPOSE STATE STATE AND AREA STATE	P0 7.2	DTS/DPF 7.2
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development. PO7.4 None are applicable. DTS.OFF.7.4 None are applicable. DTS.OFF.7.5 Street level vehicle parking areas incorporate soft landscaping to improve visual and reduce solar heat absorption and reflection. DTS.OFF.7.5 None are applicable. DTS.OFF.8.1 Development, including any associated driveways and access tracks. The interplate with a properties with a prop	minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and	None are applicable.
between parking areas and the development. PG 74 Street level whicle parking areas incorporate tree planning to provide shade and reduce solar heat absorption and reflection. PG 75 Street level parking areas incorporate soft landscaping to improve visual and reduce solar heat absorption and reflection. PG 75 Street level parking areas incorporate soft landscaping to improve visual and reduce solar heat absorption and reflection. PG 75 Verhicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity. PG 75 Verhicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or profus surfaces, infiltration yaythems, drainage sivales or rain gardens that integrate with soft landscaping. PG 81 Development, including any associated driveways and access tracks are designed and constructed to allow safe and positively and access tracks are designed and constructed to allow safe and positively and access tracks are designed and constructed to allow safe and driveways and access tracks are designed and constructed to allow safe and driveways and access tracks are designed and constructed to allow safe and positively and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 82 Driveways and access tracks are designed and constructed to allow safe and positively and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 93 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 94 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 95 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 96 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 97 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 98 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PG 98 Driveways and access tracks and sloping land (wi	PO 7.3	DTS/DPF 7.3
Street level ceparking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection. DTSOFF 7.5 Street level parking areas incorporate soft landscaping to improve visual appearance within viewed from within the site and from public places. DTSOFF 7.5 Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity. DTSOFF 7.5 Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity. DTSOFF 7.5 None are applicable. DTSOFF 8.1 Development including areas and access ways incorporate integrate distormwater management techniques such as permeable or porous surfaces, inflittration and applicable. DEVELOPMENT As a propriet and applicable. DEVELOPMENT As a propriet and applicable. DEVELOPMENT As a propriet and access tracks are designed and constructed to allow safe and conversion and filling vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTSOFF 8.2 DTIVEWAYS and access tracks are designed and constructed to allow safe and conversion and applicable. DTSOFF 8.2 DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTSOFF 8.3 DEVELOPMENT As a propriet and applicable. DTSOFF 8.4 None are applicable.	1	None are applicable.
The provider of the state of t	P0 7.4	DTS/DPF 7.4
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places. Po 78 Vehicle parking areas and associated driveways are landscaped to provide and positively contribute to amenity. Po 77 Vehicle parking areas and ascess ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltrations systems, drainage availes or rain gardens that integrate with soft landscaping. Po 81 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography, minimises the need for earthworks to limit disturbance to natural topography and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). Po 83 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway) are designed to integrate with the natural topography of the land. Po 84 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). (b) grive even the provide level transition areas for the safe movement of people and poods to and from the development on along land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site driange systems to minimise evision.		None are applicable.
Spearance when viewed from within the site and from public places. PO 7.6 Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage awales or rain gardens that integrate with soft landscaping. PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). PO 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). PO 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 PO 9.4 P	PO 7.5	DTS/DPF 7.5
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity. PO 7.7 Vehicle parking areas and access ways incorporate integrated stormwate techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography infiling exceeding a vertical height of 1 m. (b) filling exceeding a vertical height of 1 m. (c) a total combined excavation and filling vertical height of 2 m or more. PO 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.4 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.5 Driveways and access tracks on sloping land (with a gradient exceeding 1 in	1	None are applicable.
Shade and positively contribute to amenity. PO 77 Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or prorous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Development access on sloping land (with a gradient exceeding 1 in 8). PO 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway; (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	PO 7.6	DTS/DPF 7.6
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. Cantiworks and stoping land	· · · · · · · · · · · · · · · · · · ·	None are applicable.
management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping. PO 8.1	P0 7.7	DTS/DPF 7.7
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. PO 8.2	management techniques such as permeable or porous surfaces, infiltration	None are applicable.
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Comparison of the provided level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2	Earthworks a	nd sloping land
minimises the need for earthworks to limit disturbance to natural topography. (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 DTIVEWAYS and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and access tracks on sloping land (with a gradient exceeding 1 in 8). DTIVEWAYS and acc	PO 8.1	DTS/DPF 8.1
(a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. DTS/DPF 8.3 None are applicable. DTS/DPF 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.		Development does not involve any of the following:
DTS/DPF 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8). DTS/DPF 8.3 DTS/DPF 8.3 DTS/DPF 8.3 DTS/DPF 8.3 DTS/DPF 8.3 DTS/DPF 8.3 None are applicable. DTS/DPF 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	iniminises the need for earthworks to mini disturbance to natural topography.	(a) excavation exceeding a vertical height of 1m
DTS/DPF 8.2 Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. DTS/DPF 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. DTS/DPF 8.4 None are applicable. DTS/DPF 8.4 None are applicable.		(b) filling exceeding a vertical height of 1m
Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8). Po 8.3		(c) a total combined excavation and filling vertical height of 2m or more.
convenient access on sloping land (with a gradient exceeding 1 in 8). 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. DTS/DPF 8.3 DTS/DPF 8.3 None are applicable. (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. DTS/DPF 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	PO 8.2	DTS/DPF 8.2
driveway (b) are constructed with an all-weather trafficable surface. DTS/DPF 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. DTS/DPF 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.		
PO 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. PO 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion. DTS/DPF 8.4 None are applicable.		· · · · · · · · · · · · · · · · · · ·
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. PO 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion. None are applicable. None are applicable.		(b) are constructed with an all-weather trafficable surface.
8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. PO 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion. DTS/DPF 8.4 None are applicable.	PO 8.3	DTS/DPF 8.3
(b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. PO 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion. DTS/DPF 8.4 None are applicable.	1 , - , - , - , - , - , - , - , - , - ,	None are applicable.
(c) are designed to integrate with the natural topography of the land. PO 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion. DTS/DPF 8.4 None are applicable.	(b) provide level transition areas for the safe movement of people and	
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion. None are applicable.		
alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	PO 8.4	DTS/DPF 8.4
PO 8.5 DTS/DPF 8.5	alteration of natural drainage lines and includes on-site drainage systems to	None are applicable.
	PO 8.5	DTS/DPF 8.5

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Development does not occur on land at risk of landslip nor increases the	None are applicable.
potential for landslip or land surface instability.	
Fences	and Walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual Privacy	(in building 3 storeys or less)
PO 10.1	DTS/DPF 10.1
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with a residential allotment/site satisfy one of the following:
	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm
	(b) have sill heights greater than or equal to 1.5m above finished floor level
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases
All Residential development	
PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	DTS/DPF 11.1 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street.
P0 11.2	DTS/DPF 11.2
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.
Outlook a	nd amenity
PO 12.1	DTS/DPF 12.1
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an outlook towards the street frontage or private open space, public open space, or waterfront areas.
	<u> </u>

PO 12 2

Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.

DTS/DPF 12.2

None are applicable.

Ancillary Development

PO 13.1

Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.

DTS/DPF 13.1

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
 - in front of any part of the building line of the dwelling to which it is ancillary

or

- within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - (i) is set back at least 5.5m from the boundary of the primary
 - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
 - A. for dwellings of single building level 7m in width or 50% of the site frontage, whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (9) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level (and not including a gable end)
- have a roof height where no part of the roof is more than 5m above the natural ground level
- if clad in sheet metal, is pre-colour treated or painted in a nonreflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
 - (i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

(ii) the amount of existing soft landscaping prior to the

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024 development occurring.
	(I) in relation to ancillary accommodation in the Rural Zone, Productive Rural Landscape Zone, or Rural Horticulture Zone, is located within 20m of an existing dwelling.
Po 13.2 Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision or car parking requirements and do not result in over-development of the site.	DTS/DPF 13.2 Ancillary buildings and structures do not result in: (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
PO 13.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa is positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.	DTS/DPF 13.3 The pump and/or filtration system is ancillary to a dwelling erected on the same site and is: (a) enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.
Po 13.4 Buildings and structures that are ancillary to an existing non-residential use do not detract from the streetscape character, appearance of buildings on the site of the development, or the amenity of neighbouring properties.	Anon-residential ancillary buildings and structures: (a) are ancillary and subordinate to an existing non-residential use on the same site (b) have a floor area not exceeding the following: Allotment size Floor area
Garage a	ppearance

Garaging is designed to not detract from the streetscape or appearance of a Garages and carports facing a street:

DTS/DPF 14.1

PO 14.1

olicy24 P&D Code (in effect) Version 2024.7 18/04/2024 dwelling. (a) are situated so that no part of the garage or carport is in front of any part of the building line of the dwelling (b) are set back at least 5.5m from the boundary of the primary street (c) have a garage door / opening not exceeding 7m in width (d) have a garage door /opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street. Massing DTS/DPF 15.1 PO 15.1 The visual mass of larger buildings is reduced when viewed from adjoining None are applicable allotments or public streets. Dwelling additions DTS / DPF 16.1 PO 16.1 Dwelling additions are sited and designed to not detract from the streetscape Dwelling additions: or amenity of adjoining properties and do not impede on-site functional are not constructed, added to or altered so that any part is situated requirements. closer to a public street (b) do not result in: (i) excavation exceeding a vertical height of 1m (ii) filling exceeding a vertical height of 1m (iii) a total combined excavation and filling vertical height of 2m or more (iv) less Private Open Space than specified in Design Table 1 -Private Open Space less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas upper level windows facing side or rear boundaries unless: they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm have sill heights greater than or equal to 1.5m above finished floor level C. incorporate screening to a height of 1.5m above finished floor level all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land 1.7m above finished floor level in all other cases. Private Open Space DTS/DPF 17.1 PO 17.1 Dwellings are provided with suitable sized areas of usable private open space Private open space is provided in accordance with Design Table 1 - Private to meet the needs of occupants. Open Space. Water Sensitive Design PO 18.1 DTS/DPF 18.1 Residential development creating a common driveway / access includes Residential development creating a common driveway / access that services stormwater management systems that minimise the discharge of sediment, 5 or more dwellings achieves the following stormwater runoff outcomes: suspended solids, organic matter, nutrients, bacteria, litter and other (a) 80 per cent reduction in average annual total suspended solids contaminants to the stormwater system, watercourses or other water bodies. (b) 60 per cent reduction in average annual total phosphorus (c) 45 per cent reduction in average annual total nitrogen.

DTS/DPF 18.2

PO 18.2

manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	(a) maintains the pre-development peak flow rate from the site based upon a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased or captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and (b) manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings.
Car parking, access	and manoeuvrability
PO 19.1	DTS/DPF 19.1
Enclosed parking spaces are of a size and dimensions to be functional, accessible and convenient.	Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area):
	(a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.
PO 19.2	DTS/DPF 19.2
Uncovered parking spaces are of a size and dimensions to be functional, accessible and convenient.	(a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m
PO 19.3	DTS/DPF 19.3
Driveways and access points are located and designed to facilitate safe access and egress while maximising land available for street tree planting, pedestrian movement, domestic waste collection, landscaped street frontages and on-street parking.	Driveways and access points on sites with a frontage to a public road of 10m or less have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.
PO 19.4	DTS/DPF 19.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed: (i) is set back 6m or more from the tangent point of an intersection of 2 or more roads (ii) is set back outside of the marked lines or infrastructure dedicating a pedestrian crossing (iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services.
PO 19.5	DTS/DPF 19.5
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces. Downloaded on 1/05/2024 Generated	Driveways are designed and sited so that: (a) the gradient of the driveway does not exceed a grade of 1 in 4 and includes transitions to ensure a maximum grade change of 12.5% (1 in 8) for summit changes, and 15% (1 in 6.7) for sag changes, in accordance with AS 2890.1:2004 to prevent vehicles bottoming or By Policy24 Page 36 of 106

dwellings:

P&D Code (in effect) Version 2024.7 18/04/2024

Development creating a common driveway / access that services 5 or more

Policy24

Residential development creating a common driveway / access includes a

stormwater management system designed to mitigate peak flows and

manage the rate and duration of stormwater discharges from the site to

Policy24	P&D Code (in	effect) Version 2024.7 18/04/2024
	Number of bedrooms	Minimum internal floor area
	Studio	35m ²
	1 bedroom	50m ²
	2 bedroom	65m ²
	3+ bedrooms	80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom
P0 22.2	DTS/DPF 22.2	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.	
PO 22.3	DTS/DPF 22.3	
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.	
P0 22.4	DTS/DPF 22.4	
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.		
Communal	Open Space	
PO 23.1	DTS/DPF 23.1	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.	
PO 23.2	DTS/DPF 23.2	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a	minimum dimension of 5 metres.
PO 23.3	DTS/DPF 23.3	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.		
PO 23.4	DTS/DPF 23.4	
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.	
PO 23.5	DTS/DPF 23.5	
Communal open space is designed and sited to:	None are applicable.	
(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings		
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.		
Carparking, access	and manoeuvrability	
PO 24.1	DTS/DPF 24.1	
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available dir parking is retained adjacent the subject requirements:	

Policy24	(a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.	
PO 24.2	DTS/DPF 24.2	
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.	
PO 24.3	DTS/DPF 24.3	
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.	
PO 24.4	DTS/DPF 24.4	
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.	
PO 24.5	DTS/DPF 24.5	
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages of parking spaces in no more than a three-point turn manoeuvre.	
PO 24.6	DTS/DPF 24.6	
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.	
Soft Lai	ndscaping	
PO 25.1	DTS/DPF 25.1	
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.	
PO 25.2	DTS/DPF 25.2	
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
Site Facilities	/ Waste Storage	
PO 26.1	DTS/DPF 26.1	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 26.2	DTS/DPF 26.2	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 26.3	DTS/DPF 26.3	
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.	
	Page 20 of 406	

Policy24

Policy24	Pad Code (iii ellect) version 2024.7 10/04/2024
(a) located away, or screened, from public view, and	
(b) conveniently located in proximity to dwellings and the waste	
collection point.	
PO 26.4	DTS/DPF 26.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least
	3m from any habitable room window.
PO 26.5	DTS/DPF 26.5
Where waste bins cannot be conveniently collected from the street, provision	None are applicable.
is made for on-site waste collection, designed to accommodate the safe and	
convenient access, egress and movement of waste collection vehicles.	
PO 26.6	DTS/DPF 26.6
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
Screened from public view.	
Supported accommodati	on and retirement facilities
	Configuration
P0 27.1	DTS/DPF 27.1
Supported accommodation and housing for aged persons and people with	None are applicable.
disabilities is located where on-site movement of residents is not unduly	
restricted by the slope of the land.	
Mayaman	and Access
PO 28.1	DTS/DPF 28.1
Development is designed to support safe and convenient access and	None are applicable.
movement for residents by providing:	
(a) ground-level access or lifted access to all units	
(b) level entry porches, ramps, paths, driveways, passenger loading areas	
and areas adjacent to footpaths that allow for the passing of	
wheelchairs and resting places	
(c) car parks with gradients no steeper than 1-in-40 and of sufficient area	
to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	
(d) kerb ramps at pedestrian crossing points.	
Communai	Open Space
	DTS/DPF 29.1
P0 29.1	D15/DPF 29.1
Development is designed to provide attractive, convenient and comfortable	None are applicable.
indoor and outdoor communal areas to be used by residents and visitors.	
PO 29.2	DTS/DPF 29.2
Private open space provision may be substituted for communal open space	None are applicable.
which is designed and sited to meet the recreation and amenity needs of residents.	
residents.	
PO 29.3	DTS/DPF 29.3
Communal open space is of sufficient size and dimensions to cater for group	Communal open space incorporates a minimum dimension of 5 metres.
recreation.	Communal open space incorporates a minimum dimension of 5 metres.
reoreation.	
PO 29.4	DTS/DPF 29.4
Communal open space is designed and sited to:	None are applicable.
oonimunal open space is designed and sited to.	rivoire are applicable.
(a) be conveniently accessed by the dwellings which it services	
(b) have regard to acoustic, safety, security and wind effects.	
PO 29.5	DTS/DPF 29.5
Communal open space contains landscaping and facilities that are functional,	None are applicable.
attractive and encourage recreational use.	
PO 29.6	DTS/DPF 29.6
	1
	Dage 40 of 406

Policy24

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Communal open space is designed and sited to:	None are applicable.
(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Site Facilities /	Waste Storage
PO 30.1	DTS/DPF 30.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles.	None are applicable.
PO 30.2	DTS/DPF 30.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 30.3	DTS/DPF 30.3
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 30.4	DTS/DPF 30.4
Provision is made for suitable household waste and recyclable material storage facilities conveniently located and screened from public view.	None are applicable.
PO 30.5	DTS/DPF 30.5
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 30.6	DTS/DPF 30.6
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.
PO 30.7	DTS/DPF 30.7
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
All non-residen	itial development
Water Sens	sitive Design
P0 31.1	DTS/DPF 31.1
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.
PO 31.2	DTS/DPF 31.2
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.
Wash-down and Waste	Loading and Unloading
PO 32.1	DTS/DPF 32.1
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, vessels, plant or equipment are:	None are applicable.
designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off paved with an impervious material to facilitate wastewater collection	
(c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) designed to drain wastewater to either: (i) a treatment device such as a sediment trap and coalescing	
a accument device such as a sealment trap and coalescing	l

Policy24				Р	&D Code (in effect) Version 2	2024.7 18/04/2024
	plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or					
(ii)	a holding tank and its subsequent removal off-site on a regular basis.					
	De	cks				
	Design a	and Siting				
PO 33.1		DTS/DPF	33.1			
Decks are des	igned and sited to:	Decks:				
(b) minim buildii or ope	lement the associated building form hise impacts on the streetscape through siting behind the hig line of the principal building (unless on a significant allotment en space) hise cut and fill and overall massing when viewed from adjacent	(a)	where (i) (ii) (iii) (iv)	are not of situated A. B. are set I boundar when at consiste where a of soft I any com	in front of any part of the building to which it is ancillary or within 900mm of a boundary of th secondary street (if the land has l or more roads)	line of the dwelling the allotment with a coundaries on two rear allotment the defloor level the dwelling the allothe dwelling the allo
					<150 150-200 >200-450	10% 15% 20%
					>450	25%
				В.	the amount of existing soft lands development occurring.	caping prior to the
		(b)	where (i) (ii) (iii)	are set t allotmer are set t	ntion with a non-residential use: back at least 2 metres from the bo nt used for residential purposes. back at least 2 metres from a publ loor area not exceeding 25m ²	,
		(c)			a finished floor level not exceeding evel at any point.	g 1 metre above
rooms and priv	igned and sited to minimise direct overlooking of habitable vate open spaces of adjoining residential uses in d-type zones through suitable floor levels, screening and siting sount the slope of the subject land, existing vegetation on the nd fencing.	DTS/DPF 33.2 Decks with a finished floor level/s 500mm or more above natural ground level facing side or rear boundaries shared with a residential use in a neighbourhood-type zone incorporate screening with a maximum of 25% transparency/openings, permanently fixed to the outer edge of the deck not less than 1.5 m above the finished floor level/s.				
	r outdoor dining, entertainment or other commercial uses king in accordance with the primary use of the deck.		used for		sial purposes do not result in less e subject land than specified in Tra	

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	Total private open space area: (a) Site area <301m²: 24m² located behind the building line. (b) Site area ≥ 301m²: 60m² located behind the building line. Minimum directly accessible from a living room: 16m² / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): 4m² with a minimum dimension 1.8m One bedroom: 8m² with a minimum dimension 2.1m Two bedroom dwelling: 11m² with a minimum dimension 2.4m Three + bedroom dwelling: 15m² with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Design in Urban Areas

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome			
DO 1	Development is:		
	 (a) contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality (b) durable - fit for purpose, adaptable and long lasting (c) inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors (d) sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption. 		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
All Deve	plopment
External Appearance	
PO 1.1	DTS/DPF 1.1
Buildings reinforce corners through changes in setback, articulation, materials,	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
colour and massing (including height, width, bulk, roof form and slope).	
P0 1.2	DTS/DPF 1.2
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.
PO 1.3	DTS/DPF 1.3
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.
P0 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.
 (a) positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses. 	
PO 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone.	None are applicable.
Sa	fety
P0 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of	None are applicable. DTS/DPF 2.2
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2	DTS/DPF 2.2
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas.	DTS/DPF 2.2 None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm. PO 2.5 Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm. PO 2.5 Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm. PO 2.5 Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night. Lander PO 3.1 Soft landscaping and tree planting are incorporated to:	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm. PO 2.5 Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night. Lands PO 3.1 Soft landscaping and tree planting are incorporated to: (a) minimise heat absorption and reflection	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 Development is designed to differentiate public, communal and private areas. PO 2.3 Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas. PO 2.4 Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm. PO 2.5 Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night. Lander PO 3.1 Soft landscaping and tree planting are incorporated to:	DTS/DPF 2.2 None are applicable. DTS/DPF 2.3 None are applicable. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
PO 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	
P0 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.
Water Sen:	sitive Design
PO 5.1	DTS/DPF 5.1
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.
 (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs. 	
On-site Waste Tr	reatment Systems
P0 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	(a) encroach within an area used as private open space or result in less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
Car parking	appearance
P0 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	None are applicable.
P0 7.2	DTS/DPF 7.2
Vehicle parking areas appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.
P0 7.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
P0 7.4	DTS/DPF 7.4
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
PO 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual	Vehicle parking areas comprising 10 or more car parking spaces include soft
appearance when viewed from within the site and from public places.	landscaping with a minimum dimension of: (a) 1m along all public road frontages and allotment boundaries (b) 1m between double rows of car parking spaces.
	This between double rome of our parking opasco.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
P0 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks at	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks,	Development does not involve any of the following:
minimises the need for earthworks to limit disturbance to natural topography.	bevelopment does not involve any of the following.
	(a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m
	(b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.
PO 8.2	DTS/DPF 8.2
Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the
	driveway (b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
(a) do not contribute to the instability of embankments and cuttings	
(b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land.	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on site drainage systems to minimise erosion.	None are applicable.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip or increase the potential for landslip or land surface instability.	None are applicable.
	and walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
P0 9.2	DTS/DPF 9.2
Landscaping is incorporated on the low side of retaining walls that are visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual Pr	vacy (low rise buildings)
PO 10.1	DTS/DPF 10.1

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024	
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses in	Upper level windows facing side or rear boundaries shared with a residential use in a neighbourhood-type zone:	
neighbourhood-type zones.	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm	
	(b) have sill heights greater than or equal to 1.5m above finished floor level	
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.	
PO 10.2	DTS/DPF 10.2	
Development mitigates direct overlooking from balconies to habitable rooms and private open space of adjoining residential uses in neighbourhood type	One of the following is satisfied:	
zones.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or	
	(b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land	
	(ii) 1.7m above finished floor level in all other cases	
Site Facilities / Waste Storage (exclu	ding low rise residential development)	
P0 11.1	DTS/DPF 11.1	
Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	None are applicable.	
PO 11.2	DTS/DPF 11.2	
Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	None are applicable.	
PO 11.3	DTS/DPF 11.3	
Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	None are applicable.	
P0 11.4	DTS/DPF 11.4	
Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing. PO 11.5		
For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate.	DTS/DPF 11.5 None are applicable.	
, , , , , , , , , , , , , , , , , , , ,	ledium and High Rise	
External A	ppearance	
P0 12.1	DTS/DPF 12.1	
Buildings positively contribute to the character of the local area by responding to local context.	None are applicable.	
PO 12.2	DTS/DPF 12.2	
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.		
PO 12.3	DTS/DPF 12.3	
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.	
PO 12.4	DTS/DPF 12.4	
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.		

Policy24		P&D Code (in	effect) Version 2	2024.7 18/04/2024
PO 12.5	DTS/DPF 12.5			
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	(a) masonry (b) natural sto	ne d materials that mir		aterials and finishes: olouring or
PO 12.6	DTS/DPF 12.6			
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	(b) prominent common e (c) habitable r (d) areas of co	s such as shops or c entry areas for mult	ti-storey buildings (v m with public art or	the like, where
PO 12.7	DTS/DPF 12.7			
PO 12.8 Building services, plant and mechanical equipment are screened from the	(a) oriented to (b) clearly visi parking are (c) designed t there are n (d) designed t transitiona (e) located as minimise t	o be prominent, acc to active or occupied o provide shelter, a all space around the colose as practicable he need for long acc o avoid the creation	fiable from the stree entuated and a weld d ground floor uses sense of personal a entry e to the lift and / or cess corridors	coming feature if ddress and lobby access to
public realm.				
Lands	scaping			
Po 13.1 Development facing a street provides a well landscaped area that contains a deep soil space to accommodate a tree of a species and size adequate to provide shade, contribute to tree canopy targets and soften the appearance of buildings.	Buildings provide a 4m by 4m deep soil space in front of the building that accommodates a medium to large tree, except where no building setback from front property boundaries is desired.			
PO 13.2	DTS/DPF 13.2			
Deep soil zones are provided to retain existing vegetation or provide areas that can accommodate new deep root vegetation, including tall trees with large canopies to provide shade and soften the appearance of multi-storey buildings.	Multi-storey development provides deep soil zones and incorporates trees not less than the following rates, except in a location or zone where full site coverage is desired.			-
	Site area	Minimum deep soil area	Minimum dimension	Tree / deep soil zones
	<300 m ²	10 m ²	1.5m	1 small tree / 10 m ²
	300-1500 m ²	7% site area	3m	1 medium tree / 30 m ²

>1500 m²

7% site area

Tree size and site area definitions

6m

1 large or

 m^2

medium tree / 60

Small tree 4-6m mature height and 2-4m canopy spread Medium tree 6-12m mature height and 4-8m canopy spread Large tree 12m mature height and >8m canopy spread Site area The total area for development site, not average area produced in the special production of the special productio	Policy24		P&D Code (in effect) Version 2024.7 18/04/2024	
Large tree 12m mature height and -8m canopy apread		Small tree		
Site area The total area for development site, not average area proveding Otscore 132 Deep soil zones with access to natural light are provided to assist in maintaining vegetation health. PD 134 Doubles separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-ise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in sucreming new buildings of 3 or more building levels in height. Doubles separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-ise residential development incorporate a deep soil zone area is incorporated. Double to the provided of the provided of the common boundary to enable medium to large trees to be retained or established to assist in sucreming new buildings of 3 or more building levels in height. Double to the provided setting the provision of assist in the sucreman and buildings. Double to the provided setting the provision of rain water tanks (where they are not provided deswhere on site), green roofs and photovoltaic cells. Double they are not provided deswhere on site), green roofs and photovoltaic cells. Double they are not provided deswhere on site), green roofs and photovoltaic cells. Double they are not provided deswhere on site), green roofs and photovoltaic cells. Double they are not provided deswhere on site), green roofs and photovoltaic cells. Double they are not provided deswhere on site, green roofs and photovoltaic cells. Double they are not provided deswhere on site, green roofs and photovoltaic cells. Double they are not provided deswhere on site, green roofs and photovoltaic cells. Double they are not provided deswhere on site, green roofs and photovoltaic cells. Double they are not provided deswhere on site, green roofs and photovoltaic cells. Double they are not provided deswhere on site, green roofs and photovoltaic		Medium tree	6-12m mature height and 4-8m canopy spread	
Deep soil zones with access to natural light are provided to assist in maintaininy vegetation health. Deep soil zones with access to natural light are provided to assist in maintaininy vegetation health. Discorr 133 None are applicable. Discorr 134 None are applicable. Discorr 135 None are applicable. Discorr 136 None are applicable. Discorr 137 None are applicable. Discorr 142 Development minimises detrimental micro-climatic impacts on adjacent land and buildings. Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use green walls and orof designs that neable the provision or farm water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic colls. P0 14.3 Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a fall tower and alligned with the street to deflect wind away from the street (b) substantial verandals around a building to deflect downward travelling wind flows over pedistrain areas and substantial verandals around a buildings. Disport 13 Multi-level vehicle parking structures are designed to contribute to active street fromages and complement neighbouring buildings. Disport 152 Multi-level vehicle parking structures within buildings complement the original street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. Disport 152 Multi-level vehicle parking structures within buildings complement the whole parking structures within buildings.		Large tree	12m mature height and >8m canopy spread	
Deep soil zones with access to natural light are provided to assist in minitaring vegetation health. P0 124 None are applicable. DTS/DFF 124 Building elements of 3 or more building levels in height are set back at least on a zone boundary in which a deep soil zone area is incorporated. development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height. Development minimises detrimental micro-climatic impacts on adjacent land and buildings. D141 Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells. D152 D153 Development of 5 or more building levels, or 21m or more in height (as measures such as called the minimise the impacts of wind through measures such as called the manufact of the placement of buildings and use of setbacks to deflect downward travelling wind flows over pedestrian areas. (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street of the placement of buildings and use of setbacks to deflect the wind at ground level (b) avoiding full shear elevations that create windy conditions at street level. D151 Multi-level vehicle parking structures are designed to contribute to active size of frontages and complement neighbouring buildings. D152 Multi-level vehicle parking structures within buildings complement the complement adjacent buildings. D152 Multi-level vehicle parking structures within buildings complement the None are applicable.		Site area	The total area for development site, not average area per dwelling	
This is a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height. Continue	P0 13.3	DTS/DPF 13.3		
Unless separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height. Continuous testing Continu		None are applicable.		
any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary in which a deep soil zone area is incorporated. deep soil zone area aligned to adjust and soil zone area applicable. DEVENDED 1.1 Development minimises detrimental micro-climatic impacts on adjacent land and buildings. DOTATION 1.1 Development incorporates sustainable design techniques and features are applicable. DOTATION 1.2 DOTATION 1.2 DOTATION 1.3	PO 13.4	DTS/DPF 13.4		
PO 14.1 Development minimises detrimental micro-climatic impacts on adjacent land and buildings. DTS/DFF 14.2 Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells. PO 14.3 DTS/DFF 14.2 None are applicable. DTS/DFF 14.2 None are applicable. DTS/DFF 14.3 None are applicable.	any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in	Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated.		
Development minimises detrimental micro-climatic impacts on adjacent land and buildings. Po 14.2 Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells. Po 14.3 Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. Dots/DFF 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. Dots/DFF 15.2 Multi-level vehicle parking structures within buildings complement the Dots/DFF 15.2 Multi-level vehicle parking structures within buildings complement the Dots/DFF 15.2 Multi-level vehicle parking structures within buildings complement the	Enviror	nmental		
DTS/DPF 1.1 Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells. PO 14.3 Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandsha around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. DTS/DPF 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parki uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages (b) incorporate facade treatments in building elevations facing along major street frontages (b) incorporate facade treatments in building elevations facing along major street frontages (b) incorporate facade treatments in building elevations facing along major street frontages (c) Incorporate facade treatments in buildings complement and park the sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the				
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells. PO 14.3 Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. DTS/OPF 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. DTS/OPF 15.1 Multi-level vehicle parking structures within buildings: (a) provide land uses such as commercial, retail or other non-car parki uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the	•	None are applicable	2.	
as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells. PO 14.3 Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. DTS/DPF 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parkit uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the	PO 14.2	DTS/DPF 14.2		
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. Car Parking DTS/DPF 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the None are applicable.	as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic	None are applicable	2.	
measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. Po 15.1	PO 14.3	DTS/DPF 14.3		
deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. DTS/DPF 15.1	measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through	None are applicable	э.	
travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. Car Parking PO 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the None are applicable.	deflect wind away from the street			
ground level avoiding tall shear elevations that create windy conditions at street level. Car Parking PO 15.1 Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the DTS/DPF 15.2 None are applicable.	travelling wind flows over pedestrian areas			
Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the DTS/DPF 15.1 Multi-level vehicle parking structures within buildings: DTS/DPF 15.2 None are applicable.	ground level (d) avoiding tall shear elevations that create windy conditions at street			
Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the None are applicable.	Car P	arking		
street frontages and complement neighbouring buildings. (a) provide land uses such as commercial, retail or other non-car parki uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed t complement adjacent buildings. PO 15.2 DTS/DPF 15.2 Multi-level vehicle parking structures within buildings complement the None are applicable.	PO 15.1	DTS/DPF 15.1		
uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed t complement adjacent buildings. PO 15.2 Multi-level vehicle parking structures within buildings complement the None are applicable.			parking structures within buildings:	
Multi-level vehicle parking structures within buildings complement the None are applicable.		uses along (b) incorporate major stree	ground floor street frontages e facade treatments in building elevations facing along et frontages that are sufficiently enclosed and detailed to	
	P0 15.2	DTS/DPF 15.2		
		None are applicable	2	
Overlooking/Visual Privacy	Overlooking/	Visual Privacy		
PO 16.1 DTS/DPF 16.1	PO 16.1	DTS/DPF 16.1		

Policy24 P&D Code (in effect) Version 2024.7 18/04/2024 None are applicable Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as: (a) appropriate site layout and building orientation (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms (d) screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity. All residential development Front elevations and passive surveillance PO 17 1 DTS/DPF 17 1 Dwellings incorporate windows facing primary street frontages to encourage Each dwelling with a frontage to a public street: passive surveillance and make a positive contribution to the streetscape. includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. PO 17.2 DTS/DPF 17.2 Dwellings incorporate entry doors within street frontages to address the Dwellings with a frontage to a public street have an entry door visible from the street and provide a legible entry point for visitors. primary street boundary. **Outlook and Amenity** DTS/DPF 18.1 PO 18.1 A living room of a dwelling incorporates a window with an external outlook of Living rooms have an external outlook to provide a high standard of amenity for occupants. the street frontage, private open space, public open space, or waterfront areas. PO 18.2 DTS/DPF 18.2 Bedrooms are separated or shielded from active communal recreation areas, None are applicable. common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion. **Ancillary Development** PO 19.1 DTS/DPF 19.1 Ancillary buildings: Residential ancillary buildings are sited and designed to not detract from the (a) are ancillary to a dwelling erected on the same site streetscape or appearance of primary residential buildings on the site or (b) have a floor area not exceeding 60m2 neighbouring properties. (c) are not constructed, added to or altered so that any part is situated: in front of any part of the building line of the dwelling to which it is ancillary within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads) (d) in the case of a garage or carport, the garage or carport: (i) is set back at least 5.5m from the boundary of the primary street when facing a primary street or secondary street, has a total door / opening not exceeding: for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser for dwellings comprising two or more building levels at the building line fronting the same public street -7m in width (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:

Policy24			P&D Code (in effect) Version	2024.7 18/04/2024
		(i) (ii)	a longer wall or structure exists on the ad situated on the same allotment boundary and the proposed wall or structure will be bui length of boundary as the existing adjace to the same or lesser extent	It along the same
	(f) (g) (h) (i) (j) (k)	a prima boundal will not boundal existing propose have a v ground have a r the natu if clad ir reflectiv retains a	ed on a boundary of the allotment (not being street or secondary street), all walls or any will not exceed 45% of the length of that be located within 3m of any other wall along unless on an adjacent site on that bound wall of a building that would be adjacent and wall or structure wall height or post height not exceeding 3malevel (and not including a gable end) oof height where no part of the roof is moural ground level in sheet metal, is pre-colour treated or painter colour at total area of soft landscaping in accordance is less:	structures on the toundary ng the same dary there is an to or about the m above natural re than 5m above
		(i)	a total area as determined by the following	ng table:
			Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
			<150	10%
			150-200	15%
			201-450	20%
			>450	25%
	(0)		the amount of existing soft landscaping a development occurring.	
	(1)	Rural La	on to ancillary accommodation in the Rura Indscape Zone, or Rural Horticulture Zone, an existing dwelling.	
PO 19.2	DTS/DPF	19.2		
Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.	Ancillar		gs and structures do not result in: vate open space than specified in Design i	n Urban Areas Table
	(b)		ite Open Space site car parking than specified in Transpo	rt. Δccess and
		Parking	Table 1 - General Off-Street Car Parking F - Off-Street Car Parking Requirements in I	lequirements or
PO 19.3	DTS/DPF	19.3		
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.	same s	mp and/o ite and is	or filtration system is ancillary to a dwelling: :	g erected on the
	(a)		d in a solid acoustic structure that is loca est habitable room located on an adjoinin	
	(b)		at least 12m from the nearest habitable regallotment.	oom located on an
PO 19.4	DTS/DPF	19.4		
Buildings and structures that are ancillary to an existing non-residential use do not detract from the streetscape character, appearance of buildings on the	Non-residential ancillary buildings and structures:			
site of the development, or the amenity of neighbouring properties.		same si have a	floor area not exceeding the following:	esidential use on the
<u> </u>	l	Allotm	ent size Floor area	

		≤500m ²	60m ²	
		>500m ²	80m ²]
	(c) a			or altered so that any part is situated:
			• •	ne building line of the main building to
			it is ancillary	
		or (ii) within	900mm of a hou	undary of the allotment with a
				e land has boundaries on two or more
		roads)	
	(d) ir			ort, the garage or carport:
		(i) is set street		im from the boundary of the primary
		311001		
	(e) if	f situated on a	a boundary (not b	peing a boundary with a primary street
	OI	r secondary s	street), do not exc	ceed a length of 11.5m unless:
		-		re exists on the adjacent site and is
				llotment boundary
		` ' '	•	tructure will be built along the same the existing adjacent wall or structure
		_	same or lesser e	= *
			•	allotment (not being a boundary with
				treet), all walls or structures on the of the length of that boundary
				f any other wall along the same
				t site on that boundary there is an
				would be adjacent to or about the
	рі	roposed wall	or structure	
				ght) not exceeding 3m (and not
		ncluding a gal	•	
		ave a rooi nei he natural gro	-	rt of the roof is more than 5m above
		•		our treated or painted in a non-
		eflective colo		
Residential Devel	opment - Low	/ Rise		
	opment - Low ppearance	/ Rise		
	·			
PO 20.1	ppearance DTS/DPF 20.	.1	facing a street	
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20.	.1	facing a street:	
PO 20.1	ppearance DTS/DPF 20. Garages a	.1 and carports f	J	he garage or carport will be in front of
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20. Garages a	.1 and carports f	J	
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20. Garages a (a) ai ai (b) ai	.1 and carports f re situated so ny part of the	o that no part of t building line of t	
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	DTS/DPF 20. Garages a (a) ai ai (b) ai (c) ha	and carports for situated so in the situated so in part of the ire set back at ave a garage	o that no part of t building line of t t least 5.5m from door / opening v	he dwelling the boundary of the primary street vidth not exceeding 7m
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20. Garages a (a) arrain arrain (b) arrain (c) harrain (d) harrain (d)	and carports for situated so in y part of the ire set back at a garage lave a garage	o that no part of to building line of to t least 5.5m from door / opening we door / opening we	he dwelling I the boundary of the primary street Vidth not exceeding 7m Vidth not exceeding 50% of the site
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20. Garages a (a) arrain arrain (b) arrain (c) harrain (d) harrain fr	and carports for situated so iny part of the ire set back at ave a garage lave a garage rontage unles	o that no part of to building line of to t least 5.5m from door / opening we door / opening we sthe dwelling ha	he dwelling I the boundary of the primary street Width not exceeding 7m Width not exceeding 50% of the site Is two or more building levels at the
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20. Garages a (a) arrain arrain (b) arrain (c) harrain (d) harrain fr	and carports for situated so iny part of the ire set back at ave a garage lave a garage rontage unles	o that no part of to building line of to t least 5.5m from door / opening we door / opening we	he dwelling I the boundary of the primary street Width not exceeding 7m Width not exceeding 50% of the site Is two or more building levels at the
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a	ppearance DTS/DPF 20. Garages a (a) arrain arrain (b) arrain (c) harrain (d) harrain fr	and carports for situated so in y part of the ire set back at ave a garage rontage unles ruilding line from	o that no part of to building line of to t least 5.5m from door / opening we door / opening we sthe dwelling ha	he dwelling I the boundary of the primary street Width not exceeding 7m Width not exceeding 50% of the site Is two or more building levels at the
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. PO 20.2	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bt DTS/DPF 20.	and carports for situated so my part of the re set back at lave a garage lave a garage rontage unles wilding line frontage.	to that no part of to building line of to the least 5.5m from door / opening word door / opening was the dwelling has onting the same	he dwelling I the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street.
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. PO 20.2 Dwelling elevations facing public streets and common driveways make a	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bi DTS/DPF 20. Each dwel	and carports for situated some set back at ave a garage rontage unles unled in the formal set.	to that no part of to building line of to the building with the same on the building the same at least 3 of the	the dwelling the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street.
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. PO 20.2	ppearance DTS/DPF 20. Garages a (a) arrail (b) arrail (c) harrail (d) harra	and carports for situated some set back at ave a garage rontage unles suilding line from 1.2	o that no part of to building line of to the least 5.5m from door / opening word door / opening was the dwelling has onting the same	he dwelling I the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street.
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) all all (b) all (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea	and carports for a situated some set back at a year a garage rontage unless building line from the set back at a year a garage rontage unless building line from the set back at a year a garage rontage unless building line from the set back at a year a garage rontage unless building line from the set back at a year a garage rontage unless within the set back at a year a garage rontage unless within the set back at a year a garage round at a year a	o that no part of to building line of to the least 5.5m from door / opening word door / opening was the dwelling has onting the same	the dwelling the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site as two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) all all (b) all (c) had (d) had frest (b) (c) had (d) h	and carports for a situated sony part of the re set back at ave a garage rontage unless building line from the results of the	o that no part of to building line of to the least 5.5m from door / opening word door / opening was the dwelling has onting the same at least 3 of the lang a primary street the building elevator a common driven.	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway:
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) all all (b) all (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a	and carports for a situated sony part of the great back at ave a garage rontage unless building line from the great state of th	o that no part of to building line of to the least 5.5m from door / opening word of the dwelling has onting the same at least 3 of the least	the dwelling the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site as two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) all all (b) all (c) had (d) had frest (b) (d) had (d) h	and carports for a situated so in y part of the interest back at ave a garage rontage unless wilding line from the interest within a laneway)	o that no part of to building line of to the least 5.5m from door / opening word of the door / opening was the dwelling has onting the same at least 3 of the ag a primary street the building elevator a common driving the building line of the building line of the building line of the street of the building line of the building line of the street of the building line of the building line of the building line of the building line of the street of th	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. If ollowing design features within the et, and at least 2 of the following ation facing any other public road weway: In gwall is set back an additional
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) al al al (b) al (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (b) a	and carports for a situated so in a part of the are set back at ave a garage rontage unles auilding line from the atures within a laneway) I minimum of a common to porch or portion and carbon to a port	o that no part of the building line of the teast 5.5m from door / opening we door / opening we door / opening we state dwelling has onting the same at least 3 of the aga primary street the building elevator a common driving the building line tico projects at least 3 of the building line tico projects at least 3 of the building line tico projects at least 3 of the building line tico projects at least 3 of the suilding line tico projects at least 3 of the suilding line tico projects at least 3 of the suilding line tico projects at least 3 of the suilding line tico projects at least 3 of the suilding line tico projects at least 3 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects at least 4 of the suilding line tico projects 4 of the suilding li	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. If ollowing design features within the ext, and at least 2 of the following ation facing any other public road weway: In wall is set back an additional east 1m from the building wall
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) arrain (b) arrain (c) harrain (d) harrain (d) harrain (d) harrain (d) harrain (d) harrain (d) arrain (d)	and carports for situated so any part of the are set back at ave a garage rontage unless wilding line from the atures within a laneway) I minimum of 100mm from the porch or portional and cony projects.	o that no part of the building line of the teast 5.5m from door / opening we door / opening we door / opening we state dwelling has onting the same at least 3 of the large a primary street the building leval or a common driving the building line tico projects at least from the building line tects from the building line	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional east 1m from the building wall liding wall
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) al (b) al (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (c) a (d) a	and carports for situated so my part of the re set back at ave a garage rontage unless wilding line from the result of the resul	o that no part of the building line of the teast 5.5m from door / opening who door / open	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional east 1m from the building wall In from the building wall
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) al (b) al (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (c) a (d) a (e) ea	and carports for situated so my part of the re set back at ave a garage rontage unless wilding line from the result of the resul	o that no part of the building line of the teast 5.5m from door / opening who door / open	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional east 1m from the building wall liding wall
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (c) a (d) a (e) ea el	and carports for situated so my part of the are set back at ave a garage ave a garage rontage unless wilding line from the are set back at ave a garage ave a garage ave a garage arontage unless wilding line from the area withing an a laneway) I minimum of a loom from the porch or portion or portion aves of a minimum of of a	o that no part of the building line of the teast 5.5m from door / opening we door / opening we state dwelling has onting the same at least 3 of the aga primary street the building elevator a common driving the building line tico projects at least 1m simum 400mm we are the street of the building line tico projects at least 1m simum 400mm we are the street of the building line tico projects at least 1m simum 400mm we are the street of	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional east 1m from the building wall In from the building wall
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) arrail (b) arrail (c) harrail (d) harrail (d) harrail (d) harrail (d) harrail (d) arrail (e) errail (e) errail (f) arrail (f)	and carports for situated sony part of the are set back at ave a garage ave a garage rontage unlessuilding line from the are set back at ave a garage ave a garage rontage unlessuilding line from the area within a laneway) I minimum of a loom from the porch or porthe aves of a minimum 30 he lower level	o that no part of the building line of the teast 5.5m from door / opening who door / open	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the ext, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional least 1m from the building wall liding wall of from the building wall idth extend along the width of the front the upper level projects forward from line by at least 300mm
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (c) a (d) a (e) ea el (f) a th (g) a	and carports for situated so any part of the are set back at ave a garage ave a garage rontage unless wilding line from the area withing a laneway) I minimum of a laneway I porch or port a balcony project verandah project aves of a minimum 30 he lower level a minimum of a laneway level a minimum of a laneway level a minimum of a laneway level a minimum of	o that no part of the building line of the teast 5.5m from door / opening we door / opening we state dwelling has onting the same at least 3 of the aga primary street the building elevator a common driving the building line tico projects at least 1 minum 400mm we would be for the width of the width of primary building two different mare the state of the width of the	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional least 1m from the building wall liding wall in from the building wall idth extend along the width of the front the upper level projects forward from line by at least 300mm terials or finishes are incorporated on
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (c) a (d) a (e) ea el (f) a th (g) a	and carports for situated sony part of the are set back at average ave	o that no part of the building line of the tleast 5.5m from door / opening we door / opening we state dwelling has onting the same at least 3 of the aga primary street the building elevator a common driving the building line tico projects at least 1 minum 400mm we would be formed to different make front building elevator of the width of the primary building two different make front building elevator of the width of t	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional least 1m from the building wall liding wall in from the building wall idth extend along the width of the front I the upper level projects forward from line by at least 300mm terials or finishes are incorporated on levation, with a maximum of 80% of
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (c) a (d) a (e) ea el (f) a th (g) a	and carports for situated sony part of the are set back at average ave	o that no part of the building line of the tleast 5.5m from door / opening we door / opening we state dwelling has onting the same at least 3 of the aga primary street the building elevator a common driving the building line tico projects at least 1 minum 400mm we would be formed to different make front building elevator of the width of the primary building two different make front building elevator of the width of t	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional least 1m from the building wall liding wall in from the building wall idth extend along the width of the front the upper level projects forward from line by at least 300mm terials or finishes are incorporated on
Po 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling. Po 20.2 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common	ppearance DTS/DPF 20. Garages a (a) ai (b) ai (c) ha (d) ha fr bu DTS/DPF 20. Each dwel building el design fea (other than (a) a (b) a (c) a (d) a (e) ea el (f) a th (g) a	and carports for situated sony part of the are set back at average ave	o that no part of the building line of the tleast 5.5m from door / opening we door / opening we state dwelling has onting the same at least 3 of the aga primary street the building elevator a common driving the building line tico projects at least 1 minum 400mm we would be formed to different make front building elevator of the width of the primary building two different make front building elevator of the width of t	the dwelling In the boundary of the primary street width not exceeding 7m width not exceeding 50% of the site is two or more building levels at the public street. following design features within the et, and at least 2 of the following ation facing any other public road weway: Ing wall is set back an additional least 1m from the building wall liding wall in from the building wall idth extend along the width of the front I the upper level projects forward from line by at least 300mm terials or finishes are incorporated on levation, with a maximum of 80% of

Policy24

Policy24	P&D Code (in effect) Version 2024.7 18/04
20 20.3	DTS/DPF 20.3
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable
Private 0	pen Space
PO 21.1	DTS/DPF 21.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space is provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
P0 21.2	DTS/DPF 21.2
Private open space is positioned to provide convenient access from internal iving areas.	Private open space is directly accessible from a habitable room.
Lands	caping
20 22.1	DTS/DPF 22.1
Soft landscaping is incorporated into development to: (a) minimise heat absorption and reflection	Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b):
(b) contribute shade and shelter(c) provide for stormwater infiltration and biodiversity	 (a) a total area for the entire development site, including any comm property, as determined by the following table:
(d) enhance the appearance of land and streetscapes.	Site area (or in the case of residential flat building or group dwelling(s), average site area) (m²)
	<150 10%
	150-200 15%
	>200-450 20%
	>450 25%
	(b) at least 30% of any land between the primary street boundary ar primary building line.
Car parking, access	and manoeuvrability
PO 23.1	DTS/DPF 23.1
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.	Residential car parking spaces enclosed by fencing, walls or other struct have the following internal dimensions (separate from any waste storagarea):
	(a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m
	(b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.
PO 23.2	DTS/DPF 23.2
Uncovered car parking space are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have:
	(a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any f
ownloaded on 1/05/2024 Generated	(c) a minimum width between the centre line of the space and any f By Policy24 Page 53

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024		
· 6.10 /_ -7	wall or other obstruction of 1.5m.		
P0 23.3	DTS/DPF 23.3		
Driveways and access points are located and designed to facilitate safe access and egress while maximising land available for street tree planting,	Driveways and access points satisfy (a) or (b): (a) sites with a frontage to a public road of 10m or less, have a width		
pedestrian movement, domestic waste collection, landscaped street frontages and on-street parking.	between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site		
	(b) sites with a frontage to a public road greater than 10m:		
	 (i) have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; 		
	(ii) have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m.		
PO 23.4	DTS/DPF 23.4		
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b):		
	(a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land		
	(b) where newly proposed, is set back:		
	 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner 		
	(ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance		
	(iii) 6m or more from the tangent point of an intersection of 2 or more roads		
	(iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.		
PO 23.5	DTS/DPF 23.5		
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that:		
gopuoco.	(a) the gradient of the driveway does not exceed a grade of 1 in 4 and includes transitions to ensure a maximum grade change of 12.5% (1 in 8) for summit changes, and 15% (1 in 6.7) for sag changes, in accordance with AS 2890.1:2004 to prevent vehicles bottoming or scraping		
	(b) the centreline of the driveway has an angle of no less than 70 degrees and no more than 110 degrees from the street boundary to which it takes its access as shown in the following diagram:		

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	CENTRE LINE OF DRIVEWAY TO BE BETWEEN 70° TO 110° OFF THE STREET BOUNDARY 70° 110° STREET BOUNDARY ROAD (c) if located to provide access from an alley, lane or right of way - the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site.
PO 23.6	DTS/DPF 23.6
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
Waste	storage
PO 24.1	DTS/DPF 24.1
Provision is made for the convenient storage of waste bins in a location screened from public view.	Where dwellings abut both side boundaries a waste bin storage area is provided behind the building line of each dwelling that: (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.
	portable Buildings
PO 25.1	DTS/DPF 25.1
The sub-floor space beneath transportable buildings is enclosed to give the appearance of a permanent structure.	Buildings satisfy (a) or (b): (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building.
Residential Development - Medium and	High Rise (including serviced apartments)
Outlook and	Visual Privacy
PO 26.1	DTS/DPF 26.1

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Ground level dwellings have a satisfactory short range visual outlook to public,	Buildings:
communal or private open space.	 (a) provide a habitable room at ground or first level with a window facing toward the street (b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage.
PO 26.2	DTS/DPF 26.2
The visual privacy of ground level dwellings within multi-level buildings is protected.	The finished floor level of ground level dwellings in multi-storey developments is raised by up to 1.2m.
Private 0	pen Space
PO 27.1	DTS/DPF 27.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
Residential amenity i	n multi-level buildings
PO 28.1	DTS/DPF 28.1
Residential accommodation within multi-level buildings have habitable rooms, windows and balconies designed and positioned to be separated from those of other dwellings and accommodation to provide visual and acoustic privacy and allow for natural ventilation and the infiltration of daylight into interior and outdoor spaces.	Habitable rooms and balconies of independent dwellings and accommodation are separated by at least 6m from one another where there is a direct line of sight between them and 3m or more from a side or rear property boundary.
PO 28.2	DTS/DPF 28.2
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to: (a) respond to daylight, wind, and acoustic conditions to maximise comfort and provide visual privacy	Balconies utilise one or a combination of the following design elements: (a) sun screens (b) pergolas
(b) allow views and casual surveillance of the street while providing for safety and visual privacy of nearby living spaces and private outdoor areas.	(c) louvres (d) green facades (e) openable walls.
PO 28.3	DTS/DPF 28.3
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimum dimension of 2m.
PO 28.4	DTS/DPF 28.4
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling:
	(a) studio: not less than 6m ³ (b) 1 bedroom dwelling / apartment: not less than 8m ³ (c) 2 bedroom dwelling / apartment: not less than 10m ³ (d) 3+ bedroom dwelling / apartment: not less than 12m ³ .
PO 28.5 Dwellings that use light wells for access to daylight, outlook and ventilation for habitable rooms, are designed to ensure a reasonable living amenity is provided.	DTS/DPF 28.5 Light wells: (a) are not used as the primary source of outlook for living rooms (b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m if overlooked by bedrooms (c) above 18m in height have a minimum horizontal dimension of 6m, or 9m if overlooked by bedrooms.
PO 28.6 Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	DTS/DPF 28.6 None are applicable.
PO 28.7 Dwellings are designed so that internal structural columns correspond with	DTS/DPF 28.7 None are applicable.

Policy24	P&D Code	e (in effect) Version 2024.7 18/04/202	
the position of internal walls to ensure that the space within the dwelling/apartment is useable.			
	onfiguration		
P0 29.1	DTS/DPF 29.1		
Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.	Buildings containing in excess of 10 dwellings provide at least one of each of the following:		
	(c) 2 bedroom dwelling / apar (d) 3+ bedroom dwelling / apa	tment with a floor area of at least 50m ² tment with a floor area of at least 65m ² artment with a floor area of at least 80m ² , drooms provides an additional 15m ² for	
P0 29.2	DTS/DPF 29.2		
Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.	None are applicable.		
Comm	on Areas		
PO 30.1	DTS/DPF 30.1		
The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.	(a) have a minimum ceiling he (b) provide access to no more (c) incorporate a wider section exceed 12m in length from	ight of 2.7m than 8 dwellings n at apartment entries where the corridors	
Group Dwellings, Residential Flat B	uildings and Battle axe Development		
Am	enity		
PO 31.1	DTS/DPF 31.1		
Dwellings are of a suitable size to provide a high standard of amenity for occupants.	Dwellings have a minimum internal floor area in accordance with the followin table:		
	Number of bedrooms	Minimum internal floor area	
	Studio	35m ²	
	Studio 1 bedroom	35m ² 50m ²	
	1 bedroom	50m ²	
PO 31.2	1 bedroom 2 bedroom	50m ² 65m ² 80m ² and any dwelling over 3 bedrooms provides an additional	
The orientation and siting of buildings minimises impacts on the amenity,	1 bedroom 2 bedroom 3+ bedrooms	50m ² 65m ² 80m ² and any dwelling over 3 bedrooms provides an additional	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	1 bedroom 2 bedroom 3+ bedrooms DTS/DPF 31.2	50m ² 65m ² 80m ² and any dwelling over 3 bedrooms provides an additional	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours. PO 31.3 Development maximises the number of dwellings that face public open space	1 bedroom 2 bedroom 3+ bedrooms DTS/DPF 31.2 None are applicable.	50m ² 65m ² 80m ² and any dwelling over 3 bedrooms provides an additional	
PO 31.2 The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours. PO 31.3 Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties. PO 31.4 Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	1 bedroom 2 bedroom 3+ bedrooms DTS/DPF 31.2 None are applicable. DTS/DPF 31.3 None are applicable.	50m ² 65m ² 80m ² and any dwelling over 3 bedrooms provides an additional	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours. PO 31.3 Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties. PO 31.4 Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	1 bedroom 2 bedroom 3+ bedrooms DTS/DPF 31.2 None are applicable. DTS/DPF 31.3 None are applicable.	50m ² 65m ² 80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 32.2 Communal open space is of sufficient size and dimensions to cater for group recreation.	DTS/DPF 32.2 Communal open space incorporates a minimum dimension of 5 metres.
PO 32.3	DTS/DPF 32.3
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 32.4 Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	DTS/DPF 32.4 None are applicable.
PO 32.5	DTS/DPF 32.5
Communal open space is designed and sited to:	None are applicable.
(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Car parking access	s and manoeuvrability
PO 33.1	DTS/DPF 33.1
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	 (a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 33.2	DTS/DPF 33.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
PO 33.3	DTS/DPF 33.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m
	(b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 33.4	DTS/DPF 33.4
Residential driveways that service more than one dwelling or a dwelling on a battle-axe site are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
PO 33.5	DTS/DPF 33.5
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024		
Soft lan	dscaping		
PO 34.1	DTS/DPF 34.1		
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.		
P0 34.2	DTS/DPF 34.2		
Battle-axe or common driveways incorporate landscaping and permeability to	Battle-axe or common driveways satisfy (a) and (b):		
improve appearance and assist in stormwater management.	(a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).		
Site Facilities	/ Waste Storage		
PO 35.1	DTS/DPF 35.1		
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.		
PO 35.2	DTS/DPF 35.2		
Provision is made for suitable external clothes drying facilities.	None are applicable.		
PO 35.3	DTS/DPF 35.3		
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.		
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.			
PO 35.4	DTS/DPF 35.4		
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.		
PO 35.5	DTS/DPF 35.5		
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.		
PO 35.6	DTS/DPF 35.6		
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.		
Water sensitiv	re urban design		
PO 36.1	DTS/DPF 36.1		
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.		
PO 36.2	DTS/DPF 36.2		
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.		
Supported Accommodation and retirement facilities			
Siting, Configuration and Design			
P0 37.1	DTS/DPF 37.1		

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
PO 37.2	DTS/DPF 37.2
Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	None are applicable.
Movement	and Access
PO 38.1	DTS/DPF 38.1
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.
ground-level access or lifted access to all units level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places car parks with gradients no steeper than 1-in-40, and of sufficient	
area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	
Communal	Open Space
PO 39.1	DTS/DPF 39.1
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.
PO 39.2	DTS/DPF 39.2
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
P0 39.3	DTS/DPF 39.3
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 39.4	DTS/DPF 39.4
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 39.5	DTS/DPF 39.5
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 39.6	DTS/DPF 39.6
Communal open space is designed and sited to:	None are applicable.
(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Site Facilities	/ Waste Storage
PO 40.1	DTS/DPF 40.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.
PO 40.2	DTS/DPF 40.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024	
P0 40.3	DTS/DPF 40.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 40.4	DTS/DPF 40.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.	
PO 40.5	DTS/DPF 40.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 40.6	DTS/DPF 40.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
P0 40.7	DTS/DPF 40.7	
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.	
Student Acc	ommodation	
PO 41.1	DTS/DPF 41.1	
Student accommodation is designed to provide safe, secure, attractive, convenient and comfortable living conditions for residents, including an internal layout and facilities that are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction.	(a) a range of living options to meet a variety of accommodation needs, such as one-bedroom, two-bedroom and disability access units (b) common or shared facilities to enable a more efficient use of space, including: (i) shared cooking, laundry and external drying facilities (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space (iii) common storage facilities at the rate of 8m³ for every 2 dwellings or students (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas (v) bicycle parking at the rate of one space for every 2 students.	
P0 41.2	DTS/DPF 41.2	
Student accommodation is designed to provide easy adaptation of the building to accommodate an alternative use of the building in the event it is no longer required for student housing.	None are applicable.	
All non-resident	ial development	
Water Sens	itive Design	
PO 42.1	DTS/DPF 42.1	
Development likely to result in risk of export of sediment, suspended solids, organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	
PO 42.2	DTS/DPF 42.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.	
PO 42.3	DTS/DPF 42.3	
Development includes stormwater management systems to mitigate peak	None are applicable.	
flows and manage the rate and duration of stormwater discharges from the site to ensure that development does not increase peak flows in downstream systems.		

Policy24

area) (m²)

Policy24	Р	&D Code (in effect) Version 2	2024.7 18/04/2024
		<150	10%
		150-200	15%
		>200-450	20%
		>450	25%
	В.	the amount of existing soft lands development occurring.	caping prior to the
	(i) are set the allotmen (ii) are set the (iii) have a f	ntion with a non-residential use: back at least 2 metres from the bo nt used for residential purposes. back at least 2 metres from a publ loor area not exceeding 25m ² a finished floor level not exceeding	ic road.
PO 45.2	DTS/DPF 45.2		
Decks are designed and sited to minimise direct overlooking of habitable rooms and private open spaces of adjoining residential uses in neighbourhood-type zones through suitable floor levels, screening and siting taking into account the slope of the subject land, existing vegetation on the subject land, and fencing.	Decks with a finished floor level/s 500mm or more above natural ground level facing side or rear boundaries shared with a residential use in a neighbourhood-type zone incorporate screening with a maximum of 25% transparency/openings, permanently fixed to the outer edge of the deck not less than 1.5 m above the finished floor level/s.		
PO 45.3	DTS/DPF 45.3		
Decks used for outdoor dining, entertainment or other commercial uses provide carparking in accordance with the primary use of the deck.	for the primary use of the Parking Table 1 - General	cial purposes do not result in less of e subject land than specified in Tra I Off-Street Car Parking Requireme rements in Designated Areas.	nsport, Access and

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site Configuration	Minimum Rate	
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m²: 24m² located behind the building line. (b) Site area ≥ 301m²: 60m² located behind the building line. Minimum directly accessible from a living room: 16m² / with a minimum dimension 3m.	
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.	
Dwelling in a residential flat building or mixed use building which incorporate above	Dwellings at ground level:	15m ² / minimum dimension 3m	
ground level dwellings	Dwellings above ground level:		
	Studio (no separate bedroom)	4m ² / minimum dimension 1.8m	
	One bedroom dwelling	8m ² / minimum dimension 2.1m	
	Two bedroom dwelling	11 m ² / minimum dimension 2.4m	

Policy24		P&D Code (in effect) Version 2024.7 18/04/2024
	Three + bedroom dwelling	15 m ² / minimum dimension 2.6m

Forestry

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Si	ing	
P0 1.1	DTS/DPF 1.1	
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).	
PO 1.3	DTS/DPF 1.3	
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.	
Water P	rotection	
PO 2.1	DTS/DPF 2.1	
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	(a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer) (c) are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).	
Fire Mar	nagement	
P0 3.1	DTS/DPF 3.1	
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	Commercial forestry plantations provide: (a) 7m or more wide external boundary firebreaks for plantations of 4	

Policy24	D\$D	`ada (in affac	ct) Version 2024.7 18/04/202
Policy24		oae (in errec	ct) version 2024./ 18/04/202
	or less (b) 10m or more wide extended between 40ha and 10		firebreaks for plantations of
	(c) 20m or more wide ext	ernal boundary	r firebreaks, or 10m with an red plantation, for plantations of
	I	•	s access tracks) may be included ad by other policies of the Code.
PO 3.2	DTS/DPF 3.2		
Commercial forestry plantations incorporate appropriate fire management access tracks.	Commercial forestry plantatio	n fire managen	nent access tracks:
	(a) are incorporated with	in all firebreaks	
		with a vertical c	clearance of 4m or more
		ss track are ap	gh access at junctions, or if they propriately signposted and r fire-fighting vehicles
	(d) partition the plantatio		
Power-line	Clearances		
PO 4.1	DTS/DPF 4.1		
Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines.	Commercial forestry plantatio height of greater than 6m mee following table:	=	g trees with an expected mature requirements listed in the
	Voltage of transmission line	Tower or Pole	Minimum horizontal clearance distance between plantings and transmission lines
	500 kV	Tower	38m
	275 kV	Tower	25m
	132 kV	Tower	30m
	132 kV	Pole	20m
	66 kV	Pole	20m
	Less than 66 kV	Pole	20m

Housing Renewal

Assessment Provisions (AP)

The Housing Renewal General Development Policies are only applicable to dwellings or residential flat building undertaken by:

- (a) the South Australian Housing Trust either individually or jointly with other persons or bodies
- (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.

Desired Outcome (DO)

	Desired Outcome
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and
	tenures to enhance the residential amenity of the local area.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /	
	Designated Performance Feature	
Land Use a	and Intensity	
PO 1.1	DTS/DPF 1.1	
Residential development provides a range of housing choices.	Development comprises one or more of the following:	
	(a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings.	
P0 1.2	DTS/DPF 1.2	
Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.	
Buildin	g Height	
PO 2.1	DTS/DPF 2.1	
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).	
P0 2.2	DTS/DPF 2.2	
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary.	None are applicable.	
Primary St	reet Setback	
P0 3.1	DTS/DPF 3.1	
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah porch, awning or similar structure) than 3m.	
Secondary S	treet Setback	
PO 4.1	DTS/DPF 4.1	
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.	
Bounda	ary Walls	
PO 5.1	DTS/DPF 5.1	
Boundary walls are limited in height and length to manage visual impacts and access to natural light and ventilation.	Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b):	
	(a) adjoin or abut a boundary wall of a building on adjoining land for the same length and height (b) do not: (i) exceed 3.2m in height from the lower of the natural or	
	finished ground level (ii) exceed 11.5m in length (iii) when combined with other walls on the boundary of the	
	subject development site, a maximum 45% of the length of the boundary (iv) encroach within 3 metres of any other existing or proposed	

Policy24	P&D Code (in effect) Version 2024.7 18/04/202	
	boundary walls on the subject land.	
P0 5.2 Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape character.	DTS/DPF 5.2 Dwellings in a semi-detached or row arrangement are set back 900mm or more from side boundaries shared with allotments outside the developme site, except for a carport or garage.	
	dary Setback	
P0.6.1	DTS/DPF 6.1	
Buildings are set back from side boundaries to provide:	Other than walls located on a side boundary, buildings are set back from side boundaries in accordance with the following:	
 (a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours. 	_	
Rear Boun	dary Setback	
P0 7.1	DTS/DPF 7.1	
Buildings are set back from rear boundaries to provide:	Dwellings are set back from the rear boundary:	
 (a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation. 	 (a) 3m or more for the first building level (b) 5m or more for any subsequent building level. 	
	evation design T	
P0 8.1 Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway: (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building elevation (c) a balcony projects from the building elevation (d) a verandah projects at least 1m from the building elevation (e) eaves of a minimum 400mm width extend along the width of the fron elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the	
	building elevation in a single material or finish.	
PO 8.2 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street	
P0 8.3	DTS/DPF 8.3	
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable.	
P0 8.4	DTS/DPF 8.4	
ownloaded on 1/05/2024 Generated	By Policy24 Page 67 of 10	

Policy24		P&D Code (in effect) \	Version 2024.7 18/04/2024
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.		
PO 8.5	DTS/DPF 8.5		
Entrances to multi-storey buildings are:	None are applicable.		
(a) oriented towards the street (b) visible and easily identifiable from the street (c) designed to include a common mail box structure.			
Outlook a	nd amenity		
PO 9.1	DTS/DPF 9.1		
Living rooms have an external outlook to provide a high standard of amenity for occupants.	_	lling incorporates a windov ntage or private open spac	w with an external outlook e.
PO 9.2	DTS/DPF 9.2		
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.		
Private 0	pen Space		
PO 10.1	DTS/DPF 10.1		
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space is p	orovided in accordance wit	th the following table:
	Dwelling Type	Dwelling / Site	Minimum Rate
		Configuration	
	Dwelling (at ground level)		Total area: 24m² located behind the building line Minimum adjacent to a living room: 16m² with a
	Dwelling (above ground level)	Studio	minimum dimension 3m 4m ² / minimum dimension 1.8m
		One bedroom dwelling	8m² / minimum dimension 2.1m
		Two bedroom dwelling	11m² / minimum dimension 2.4m
		Three + bedroom dwelling	15 m ² / minimum dimension 2.6m
PO 10.2	DTS/DPF 10.2		
Private open space positioned to provide convenient access from internal living areas.	At least 50% of the req habitable room.	uired area of private open	space is accessible from a
PO 10.3	DTS/DPF 10.3		
Private open space is positioned and designed to:	None are applicable.		
(a) provide useable outdoor space that suits the needs of occupants; (b) take advantage of desirable orientation and vistas; and (c) adequately define public and private space.			
Visual	privacy		
PO 11.1	DTS/DPF 11.1		
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.		acing side or rear boundari ite satisfy one of the follo	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	 (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5m above the finished floor.
PO 11.2	DTS/DPF 11.2
Development mitigates direct overlooking from upper level balconies and terraces to habitable rooms and private open space of adjoining residential uses.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases
PO 12.1	DTS/DPF 12.1
Soft landscaping is incorporated into development to: (a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes.	Residential development incorporates pervious areas for soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b) (a) a total area as determined by the following table: Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m²) Very comparison of the case of residential flat building or group dwelling(s), average site area) (m²) Very comparison of the case of residential flat building or group dwelling(s), average site area) (m²) Very comparison of the case of residential flat building or group dwelling(s), average site area) (m²) Very comparison of the case of residential flat building line.
Water Sen:	sitive Design
PO 13.1	DTS/DPF 13.1
Residential development is designed to capture and use stormwater to: (a) maximise efficient use of water resources (b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage runoff quality to maintain, as close as practical, predevelopment conditions.	None are applicable.
Car F	Parking
PO 14.1	DTS/DPF 14.1
On-site car parking is provided to meet the anticipated demand of residents, with less on-site parking in areas in close proximity to public transport.	On-site car parking is provided at the following rates per dwelling: (a) 2 or fewer bedrooms - 1 car parking space (b) 3 or more bedrooms - 2 car parking spaces.
P0 14.2	DTS/DPF 14.2
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.	Residential parking spaces enclosed by fencing, walls or other obstructions with the following internal dimensions (separate from any waste storage area): (a) single parking spaces:
	By Policy24 Page 69 of 106

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	(i) a minimum length of 5.4m (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.5m (iii) minimum garage door width of 2.4m per space.
PO 14.3 Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.	DTS/DPF 14.3 Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.
PO 14.4	DTS/DPF 14.4
Residential flat buildings and group dwelling developments provide sufficient on-site visitor car parking to cater for anticipated demand.	Visitor car parking for group and residential flat buildings incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.
PO 14.5	DTS/DPF 14.5
Residential flat buildings provide dedicated areas for bicycle parking.	Residential flat buildings provide one bicycle parking space per dwelling.
Oversh	adowing
Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	None are applicable.
Wa	aste T
Provision is made for the convenient storage of waste bins in a location screened from public view.	DTS/DPF 16.1 A waste bin storage area is provided behind the primary building line that: (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.
P0 16.2	DTS/DPF 16.2
Residential flat buildings provide a dedicated area for the on-site storage of waste which is: (a) easily and safely accessible for residents and for collection vehicles (b) screened from adjoining land and public roads (c) of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection.	None are applicable.
Vehicle	I Access
PO 17.1 Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	DTS/DPF 17.1 None are applicable.
PO 17.2 Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	DTS/DPF 17.2 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	access point for which consent has been granted as part of an
	application for the division of land (b) where newly proposed is set back:
	(b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner
	(ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance
	(iii) 6m or more from the tangent point of an intersection of 2 or more roads
	^(iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
P0 17.3	DTS/DPF 17.3
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that:
	 (a) the gradient of the driveway does not exceed a grade of 1 in 4 and includes transitions to ensure a maximum grade change of 12.5% (1 in 8) for summit changes, and 15% (1 in 6.7) for sag changes, in accordance with AS 2890.1:2004 to prevent vehicles bottoming or scraping (b) the centreline of the driveway has an angle of no less than 70 degrees and no more than 110 degrees from the street boundary to which it takes its access as shown in the following diagram:
	CENTRE LINE OF DRIVEWAY TO BE BETWEEN 70° TO 110° OFF THE STREET BOUNDARY
	DRIVEWAY
	STREET BOUNDARY
	ROAD
	(c) if located to provide access from an alley, lane or right of way - the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site.
PO 17.4	DTS/DPF 17.4
Driveways and access points are designed and distributed to optimise the provision of on-street parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 17.5	DTS/DPF 17.5

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Residential driveways that service more than one dwelling of a dimension to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 17.6	DTS/DPF 17.6
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre
PO 17.7	DTS/DPF 17.7
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Sto	orage
PO 18.1	DTS/DPF 18.1
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling:
	 (a) studio: not less than 6m³ (b) 1 bedroom dwelling / apartment: not less than 8m³ (c) 2 bedroom dwelling / apartment: not less than 10m³ (d) 3+ bedroom dwelling / apartment: not less than 12m³.
Eart	hworks
PO 19.1	DTS/DPF 19.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	The development does not involve: (a) excavation exceeding a vertical height of 1m or (b) filling exceeding a vertical height of 1m or (c) a total combined excavation and filling vertical height exceeding 2m.
Service connectio	Ins and infrastructure
PO 20.1	DTS/DPF 20.1
Dwellings are provided with appropriate service connections and	The site and building:
infrastructure.	(a) have the ability to be connected to a permanent potable water supply (b) have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011 (c) have the ability to be connected to electricity supply
	 (d) have the ability to be connected to an adequate water supply (and pressure) for fire-fighting purposes (e) would not be contrary to the Regulations prescribed for the purposes of Section 86 of the <i>Electricity Act 1996</i>.
Site con	tamination
P0 21.1	DTS/DPF 21.1
Land that is suitable for sensitive land uses to provide a safe environment.	Development satisfies (a), (b), (c) or (d):
	(a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use (c) involves a change in the use of land to a more sensitive use on land at
	which <u>site contamination</u> does not exist (as demonstrated in a <u>site contamination declaration form</u>) (d) involves a change in the use of land to a <u>more sensitive use</u> on land at

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024		
	which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that A. site contamination does not exist (or no longer exists) at the land or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) or C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)		
	and (ii) no other <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a <u>site contamination declaration form</u>).		

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome				
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.				

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ger	neral
PO 1.1	DTS/DPF 1.1
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.
Visual	Amenity
PO 2.1	DTS/DPF 2.1
The visual impact of above-ground infrastructure networks and services (excluding high voltage transmission lines), renewable energy facilities (excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by: (a) utilising features of the natural landscape to obscure views where practicable	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
(b) siting development below ridgelines where practicable	
(c) avoiding visually sensitive and significant landscapes	
(d) using materials and finishes with low-reflectivity and colours that complement the surroundings	
(e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the	
(f) incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers.	
P0 2.2	DTS/DPF 2.2
Pumping stations, battery storage facilities, maintenance sheds and other ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land.	None are applicable.
P0 2.3	DTS/DPF 2.3
Surfaces exposed by earthworks associated with the installation of storage facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land.	None are applicable.
Rehab	ilitation
P0 3.1	DTS/DPF 3.1
Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead of or upon decommissioning of areas used for renewable energy facilities and transmission corridors.	None are applicable.
Hazard M:	anagement
PO 4.1	DTS/DPF 4.1
Infrastructure and renewable energy facilities and ancillary development located and operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for energy generation, power storage and transmission are separated as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	None are applicable.
PO 4.3	DTS/DPF 4.3
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.
Electricity Infrastructure an	d Battery Storage Facilities
PO 5.1	DTS/DPF 5.1
Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
(a) siting utilities and services: (i) on areas already cleared of native vegetation (ii) where there is minimal interference or disturbance to existing native vegetation or biodiversity	
(b) grouping utility buildings and structures with non-residential development, where practicable.	
P0 5.2	DTS/DPF 5.2
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.
PO 5.3	DTS/DPF 5.3
Battery storage facilities are co-located with substation infrastructure where	None are applicable.

Policy	24	P&D Code (in effect) Version 2024.7 18/04/2024
praction impact	cable to minimise the development footprint and reduce environmental ts.	
	Telecommuni	cation Facilities
PO 6.1		DTS/DPF 6.1
towers by co-l	oliferation of telecommunications facilities in the form of s/monopoles in any one locality is managed, where technically feasible, ocating a facility with other communications facilities to mitigate its from clutter on visual amenity.	None are applicable.
PO 6.2		DTS/DPF 6.2
	mmunications antennae are located as close as practicable to support ures to manage overall bulk and mitigate impacts on visual amenity.	None are applicable.
PO 6.3		DTS/DPF 6.3
	mmunications facilities, particularly towers/monopoles, are located zed to mitigate visual impacts by the following methods:	None are applicable.
(a)	where technically feasible, incorporating the facility within an existing structure that may serve another purpose	
	or all of the following:	
(b)	using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services	
(c) (d)	using materials and finishes that complement the environment screening using landscaping and vegetation, particularly for equipment shelters and huts.	
	Renewable E	nergy Facilities
PO 7.1		DTS/DPF 7.1
transm	rable energy facilities are located as close as practicable to existing hission infrastructure to facilitate connections and minimise nmental impacts as a result of extending transmission infrastructure.	None are applicable.
	Renewable Energy F	Facilities (Wind Farm)
PO 8.1		DTS/DPF 8.1
tourist	impact of wind turbine generators on the amenity of residential and development is reduced through appropriate separation.	Wind turbine generators are: (a) set back at least 2000m from the base of a turbine to any of the following zones: (i) Rural Settlement Zone (ii) Township Zone (iii) Rural Living Zone (iv) Rural Neighbourhood Zone with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine). (b) set back at least 1500m from the base of the turbine to non-associated (non-stakeholder) dwellings and tourist accommodation
PO 8.2		DTS/DPF 8.2
The vis	sual impact of wind turbine generators on natural landscapes is ged by:	None are applicable.
(a)	designing wind turbine generators to be uniform in colour, size and shape	
(b) (c)	coordinating blade rotation and direction mounting wind turbine generators on tubular towers as opposed to lattice towers.	
PO 8.3		DTS/DPF 8.3

TOTACH F 4.4 Indicator to provide recognition systems or physical markers or infinitesis the risk to alterate properties. TOTACH F 4.4 No Commonwealth air safety (CASA / ASA) or Defence requirement is spolicable. TOTACH F 4.5 No Commonwealth air safety (CASA / ASA) or Defence requirement is spolicable. TOTACH F 4.5 No Commonwealth air safety (CASA / ASA) or Defence requirement is spolicable. TOTACH F 4.5 No Commonwealth air safety (CASA / ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) TOTACH F 4.5 NO COMMONWEALTH ASA) TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA (TOTACH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA (TOTACH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA (TOTACH ASA) or Defence requirement is spolicable. TOTACH F 4.5 NO COMMONWEALTH ASA (T	Policy24		P&D C	ode (in eff	ect) Version	2024.7 18/04/2024
Similar the risk to aircraft operations. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 8. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 8. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 8. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 8. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 8. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9. TO SET 9. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9. TO SET 9. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9. TO SET 9. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9. TO SET 9. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9. TO SET 9. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9. TO SET 9. No Commonwealth air safety (CASA / ASA) or Defence requirement is sphilosoble. TO SET 9.	Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applic	able.			
aminimise the risk to alroral to perations. applicable. Tracors a Solon Solon Solon (Solon Solon Sol	PO 8.4	DTS/DPF 8.4				
None are applicable. None are applicable None are applicable	Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.					
Renewable transport facilities generating SMW or more are not to indeed on land requiring the clearance of areas of intact native vegetation or in land of high environmental, scenic or cultural value. ODEST 1 None are applicable. ODEST 2 International mounted solar power facilities allow for movement of wildlife by: (a) incorporating wildlife corridors and habitat enfuge. (b) evologing the use of extensive accuraty or parlimeter fencing or incorporating facilities are minimised through separation or nonconservation areas and sensitive receivers in other ownership. ODEST 3 STATES 3 Ground mounted solar power facilities are minimised through separation or nonconservation areas and sensitive receivers in other ownership. ODEST 5 3 Ground mounted solar power facilities are set back from land boundaries, conservation areas and sensitive receivers in other ownership. ODEST 5 3 Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following circles. ODEST 5 3 Ground mounted solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family impacts of solar power facilities are set back from family international family international family i	PO 8.5	DTS/DPF 8.5				
DISCRESS 1 None are applicable. DISCRESS 2 None are applicable. DISCRESS 3 None are applicable. DISCRESS 4 None are applicable. DISCRESS 3 None are applicable. DISCRESS 4 None are applicable. DISCRESS 5 None are applicable. DISCRESS 5 None are applicable. DISCRESS 6 None are applicable. DISCRE	Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing strobes.	None are applic	able.			
None are applicable.	Renewable Energy Fa	L acilities (Solar Power)			
In land of high environmental, scenic or cultural value. OR 2 OR 2 Tround mounted solar power facilities allow for movement of wildlife by: (a) incorporating wildlife corridors and habitat refuges (b) avoiding the use of extensive security or perimeter fronting or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility. OR 3 OR 3	PO 9.1	DTS/DPF 9.1				
Tround mounted solar power facilities allow for movement of wildlife by: (a) incorporating wildlife corridors and habitat refuges (b) avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility. 29-3 mently impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership. Capacity size of array adjoining conservation areas and relevant zones in accordance with the following criteria: Capacity size of array adjoining conservation areas and relevant zones in accordance with the following criteria: Capacity size of array adjoining conservation areas and relevant zones in accordance with the following criteria: Capacity size of array adjoining conservation areas and relevant zones in accordance with the following criteria: Capacity size of array adjoining conservation areas and relevant zones in accordance with the following criteria: Capacity size of array adjoining conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones in accordance with the following conservation areas and relevant zones i	Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	None are applic	able.			
Incorporating wildlife corridors and habitat refuges avoiding the use of extensive security or perimeter foncing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility.	PO 9.2	DTS/DPF 9.2				
(b) avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility. 109.3 Menity impacts of solar power facilities are minimised through separation or conservation areas and sensitive receivers in other ownership. 1075/DPF 9.3 Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria: 1075/DPF 9.3 Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria: 1075/DPF 9.3 Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria: 1075/DPF 9.4 1075/	Ground mounted solar power facilities allow for movement of wildlife by:	None are applic	able.			
Ground mounted solar power facilities are minimised through separation conservation areas and sensitive receivers in other ownership. Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria: Generation Capacity size of array adjoining land boundary servation areas and relevant zones in accordance with the following criteria: Generation Capacity size of array from adjoining land boundary servation areas and relevant zones in accordance with the following criteria: Generation Approximate from adjoining land boundary servation areas and relevant zones in accordance with the following criteria: Generation Approximate from adjoining land boundaries, from adjoining land boundaries, conservation areas and relevant zones in accordance with the following criteria: Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria: Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria: Generation Approximate Setback from from adjoining land boundaries, conservation areas and relevant zones in accordance with the following criteria: Generation Approximate Setback from adjoining land land boundaries, conservation areas and relevant zones in accordance with the following criteria: Generation Approximate Setback from from adjoining land land boundaries, conservation areas and relevant zones in accordance with the following criteria: Generation Approximate Setback from from adjoining land land land land land land land land	(b) avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals					
conservation areas and sensitive receivers in other ownership. Capacity Approximate Setback from adjoining land boundary Setback from adjoining land boundary Settlement, Two settl	PO 9.3	DTS/DPF 9.3				
Capacity size of array from adjoining land boundary some servation areas land settlement, Rural National Settlement, Rural Settlement, Rural National Settlement, Rural National Settlement, Rural Settlement, Rural National Settlement, Rural Settlement, Rural National Settlement, Rural N	Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership.	conservation are				
10MW<50MW 16ha<80ha 25m 500m 1.5km 5MW<10MW 8ha to <16ha 20m 500m 1km 1MW<5MW 1.6ha to <8ha 15m 500m 500m 100kW<1MW 0.5ha<1.6ha 10m 500m 100m <100kW <0.5ha 5m 500m 25m Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DFF 9.4 None are applicable.				from adjoining land	from conservation	Township, Rural Settlement, Rural Neighbourhood and Rural Living
SMW<10MW 8ha to <16ha 20m 500m 1km 1MW<5MW 1.6ha to 8ha 15m 500m 500m 100kW<1MW 0.5ha<1.6ha 10m 500m 100m <100kW <0.5ha 5m 500m 25m Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 None are applicable.		50MW>	80ha+	30m	500m	2km
1MW<5MW 1.6ha to 48ha 100kW<1MW 0.5ha 100kW<1MW 0.5ha 100kW<0.5ha 5m 500m 25m Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 None are applicable. DTS/DPF 9.4 None are applicable.		10MW<50MW	16ha-<80ha	25m	500m	1.5km
Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 When the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 None are applicable.		5MW<10MW	8ha to <16ha	20m	500m	1km
Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 Around mounted solar power facilities incorporate landscaping within etbacks from adjacent road frontages and boundaries of adjacent llotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.		1MW<5MW		15m	500m	500m
Notes: 1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 Fround mounted solar power facilities incorporate landscaping within etbacks from adjacent road frontages and boundaries of adjacent llotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.		100kW<1MW	0.5ha<1.6ha	10m	500m	100m
1. Does not apply when the site of the proposed ground mounted solar power facility is located within one of these zones. DTS/DPF 9.4 None are applicable. Hotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.		<100kW	<0.5ha	5m	500m	25m
facility is located within one of these zones. DTS/DPF 9.4 None are applicable. Ilotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.		Notes:				
round mounted solar power facilities incorporate landscaping within etbacks from adjacent road frontages and boundaries of adjacent llotments accommodating non-host dwellings, where balanced with offrastructure access and bushfire safety considerations.						ounted solar power
etbacks from adjacent road frontages and boundaries of adjacent llotments accommodating non-host dwellings, where balanced with nfrastructure access and bushfire safety considerations.	PO 9.4	DTS/DPF 9.4				
Hydropower / Pumped Hydropower Facilities	Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applic	able.			
	Hydropower / Pumpe	d Hydropower Faciliti	es			

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024		
PO 10.1	DTS/DPF 10.1		
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applicable.		
PO 10.2 Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	DTS/DPF 10.2 None are applicable.		
PO 10.3 Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	DTS/DPF 10.3 None are applicable.		
Water	Supply		
PO 11.1 Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	DTS/DPF 11.1 Development is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the on-going requirements of the development.		
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.	DTS/DPF 11.2 A dwelling is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the development. Where this is not available it is serviced by a rainwater tank or tanks capable of holding at least 50,000 litres of water which is: (a) exclusively for domestic use (b) connected to the roof drainage system of the dwelling.		
Wastewat	I er Services		
Po 12.1 Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the following: (a) it is wholly located and contained within the allotment of the development it will service (b) in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources (c) septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm.	DTS/DPF 12.1 Development is connected, or will be connected, to an approved common wastewater disposal service with the capacity to meet the requirements of the development. Where this is not available it is instead capable of being serviced by an on-site waste water treatment system in accordance with the following: (a) the system is wholly located and contained within the allotment of development it will service; and (b) the system will comply with the requirements of the South Australian Public Health Act 2011.		
PO 12.2 Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	DTS/DPF 12.2 Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.		
Temporar	y Facilities		
PO 13.1 In rural and remote locations, development that is likely to generate significant waste material during construction, including packaging waste, makes provision for a temporary on-site waste storage enclosure to minimise the incidence of wind-blown litter.	DTS/DPF 13.1 A waste collection and disposal service is used to dispose of the volume of waste at the rate it is generated.		
PO 13.2 Temporary facilities to support the establishment of renewable energy facilities (including borrow pits, concrete batching plants, laydown, storage, access roads and worker amenity areas) are sited and operated to minimise environmental impact.	DTS/DPF 13.2 None are applicable.		

Intensive Animal Husbandry and Dairies

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
	Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
Siting a	nd Design		
PO 1.1	DTS/DPF 1.1		
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.		
PO 1.2	DTS/DPF 1.2		
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.		
PO 1.3	DTS/DPF 1.3		
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.		
PO 1.4	DTS/DPF 1.4		
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.		
PO 1.5	DTS/DPF 1.5		
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.		
w	aste		
P0 2.1	DTS/DPF 2.1		
Storage of manure, used litter and other wastes (other than waste water lagoons) is sited, designed, constructed and managed to:	None are applicable.		
(a) avoid attracting and harbouring vermin			
(b) avoid polluting water resources (c) be located outside 1% AEP flood event areas.			

er Protection				
DTS/DPF 3.1				
Intensive animal husbandry operations are set back: (a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.				
DTS/DPF 3.2				
None are applicable.				

Interface between Land Uses

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
General Land U	se Compatibility		
P0 1.1	DTS/DPF 1.1		
Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	None are applicable.		
P0 1.2	DTS/DPF 1.2		
Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts.	None are applicable.		
Hours of	Operation		
PO 2.1	DTS/DPF 2.1		
Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an adjacent	Development operating within the following hours:		
zone primarily for sensitive receivers through its hours of operation having regard to:	Class of Development	Hours of operation	
(a) the nature of the development (b) measures to mitigate off-site impacts	Consulting room	7am to 9pm, Monday to Friday	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
(c) the extent to which the development is desired in the zone (d) measures that might be taken in an adjacent zone primarily for	8am to 5pm, Saturday
sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land.	Office 7am to 9pm, Monday to Friday
	8am to 5pm, Saturday
	Shop, other than any one or combination of the
	following: 8am to 5pm, Saturday and Sunday
	(a) restaurant (b) cellar door in the Productive Rural Landscape Zone, Rural Zone or Rural Horticulture Zone
0	vershadowing
P0 3.1	DTS/DPF 3.1
Overshadowing of habitable room windows of adjacent residential land us in: a. a neighbourhood-type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between 9.00am and 3.00pm on 21 June.
P0 3.2	DTS/DPF 3.2
Overshadowing of the primary area of private open space or communal opspace of adjacent residential land uses in:	Development maintains 2 hours of direct sunlight between 9.00 am and 3.00 pm on 21 June to adjacent residential land uses in a neighbourhood-type zone in accordance with the following:
a. a neighbourhood type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	a. for ground level private open space, the smaller of the following: i. half the existing ground level open space or
	ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m)b. for ground level communal open space, at least half of the existing ground level open space.
P0 3.3	DTS/DPF 3.3
Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account:	None are applicable.
 (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed. 	
PO 3.4	DTS/DPF 3.4
Development that incorporates moving parts, including windmills and wind farms, are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker.	None are applicable.
Activities Ger	nerating Noise or Vibration
PO 4.1	DTS/DPF 4.1
Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	Noise that affects sensitive receivers achieves the relevant Environment Protection (Commercial and Industrial Noise) Policy criteria.
PO 4.2	DTS/DPF 4.2
Areas for the on-site manoeuvring of service and delivery vehicles, plant ar equipment, outdoor work spaces (and the like) are designed and sited to runreasonably impact the amenity of adjacent sensitive receivers (or lawful approved sensitive receivers) and zones primarily intended to accommodate	not ly

sensitive receivers due to noise and vibration by adopting techniques including: (a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. PO 4.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). DTS/DPF 4.3 The pump and/or filtration system ancillary to a dwelling erected or site is: (a) enclosed in a solid acoustic structure located at least 5m f nearest habitable room located on an adjoining allotment or	om the
the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. PO 4.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). DTS/DPF 4.3 The pump and/or filtration system ancillary to a dwelling erected on site is: (a) enclosed in a solid acoustic structure located at least 5m f nearest habitable room located on an adjoining allotment or	om the
(b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. PO 4.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). DTS/DPF 4.3 The pump and/or filtration system ancillary to a dwelling erected on site is: (a) enclosed in a solid acoustic structure located at least 5m f nearest habitable room located on an adjoining allotment or	om the
enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. PO 4.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). DTS/DPF 4.3 The pump and/or filtration system ancillary to a dwelling erected on site is: (a) enclosed in a solid acoustic structure located at least 5m for nearest habitable room located on an adjoining allotment or	om the
equipment and the adjacent sensitive receiver boundary or zone. PO 4.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). DTS/DPF 4.3 The pump and/or filtration system ancillary to a dwelling erected or site is: (a) enclosed in a solid acoustic structure located at least 5m for nearest habitable room located on an adjoining allotment or	om the
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). The pump and/or filtration system ancillary to a dwelling erected on site is: (a) enclosed in a solid acoustic structure located at least 5m f nearest habitable room located on an adjoining allotment or	om the
a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers). (a) enclosed in a solid acoustic structure located at least 5m f nearest habitable room located on an adjoining allotment or	om the
approved sensitive receivers). (a) enclosed in a solid acoustic structure located at least 5m f nearest habitable room located on an adjoining allotment or	
/L)	d on an
(b) located at least 12m from the nearest habitable room located adjoining allotment.	
PO 4.4 DTS/DPF 4.4	
External noise into bedrooms is minimised by separating or shielding these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment. Adjacent land is used for residential purposes.	
PO 4.5 DTS/DPF 4.5	
Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	
PO 4.6 DTS/DPF 4.6	
Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate	es that
sensitive receivers. Assessment location Music noise level	
Externally at the nearest existing or envisaged noise sensitive location Externally at the nearest existing or envisaged noise sensitive location Less than 8dB above the level of background noise (L _{90,15min}) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)	
Air Quality	
PO 5.1 DTS/DPF 5.1	
Development with the potential to emit harmful or nuisance-generating air pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers.	
PO 5.2 DTS/DPF 5.2	
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:	
(a) incorporating appropriate treatment technology before exhaust	
emissions are released (b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers.	

In property of the state of the
ne are applicable. //DPF 6.2 ne are applicable. //Glare //DPF 7.1 ne are applicable. erence //DPF 8.1 e building or structure: a) is no greater than 10m in height, measured from existing ground level
pt/DPF 6.2 The are applicable. If Glare If DPF 7.1 The are applicable. The are applicabl
ne are applicable. / Glare //DPF 7.1 ne are applicable. erence //DPF 8.1 e building or structure: a) is no greater than 10m in height, measured from existing ground level
/ Glare //DPF 7.1 ne are applicable. erence //DPF 8.1 e building or structure: a) is no greater than 10m in height, measured from existing ground level
representation of the properties of the properti
erence //DPF 8.1 e building or structure: a) is no greater than 10m in height, measured from existing ground level
erence //DPF 8.1 e building or structure: a) is no greater than 10m in height, measured from existing ground level
c/DPF 8.1 e building or structure: a) is no greater than 10m in height, measured from existing ground level
e building or structure: a) is no greater than 10m in height, measured from existing ground level
is no greater than 10m in height, measured from existing ground level
is no ground man rom in neight, modeling members ground level
or is not within a line of sight between a fixed transmitter and fixed receiver (antenna) other than where an alternative service is available via a different fixed transmitter or cable.
Activities
V/DPF 9.1
ne are applicable.
/DPF 9.2
ne are applicable.
/DPF 9.3
nsitive receivers are located at least 200m from the boundary of a site used land-based aquaculture and associated components in other ownership.
/DPF 9.4
nsitive receivers are sited at least 500m from the boundary of a site used a dairy and associated wastewater lagoon(s) and liquid/solid waste rage and disposal facilities in other ownership.
/DPF 9.5
nsitive receivers are located away from the boundary of a site used for the adding, transportation and/or storage of bulk commodities in other nership in accordance with the following: a) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	site storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.
PO 9.6	DTS/DPF 9.6
Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	None are applicable.
PO 9.7	DTS/DPF 9.7
Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	None are applicable.
Interface with Mines and Qua	rries (Rural and Remote Areas)
PO 10.1	DTS/DPF 10.1
Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act 1971</i> .

Land Division

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Land division:
	 (a) creates allotments with the appropriate dimensions and shape for their intended use (b) allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure (c) integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features (d) facilitates solar access through allotment orientation (e) creates a compact urban form that supports active travel, walkability and the use of public transport (f) avoids areas of high natural hazard risk.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
All land division	
Allotment configuration	
P0 1.1	DTS/DPF 1.1
Land division creates allotments suitable for their intended use.	Division of land satisfies (a) or (b): (a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
P0 1.2	DTS/DPF 1.2
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality.	None are applicable.
Design a	nd Layout
P0 2.1	DTS/DPF 2.1
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls.	None are applicable.
PO 2.2	DTS/DPF 2.2
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones.	None are applicable.
PO 2.3	DTS/DPF 2.3
Land division maximises the number of allotments that face public open space and public streets.	None are applicable.
PO 2.4	DTS/DPF 2.4
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure.	None are applicable.
PO 2.5	DTS/DPF 2.5
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services.	None are applicable.
PO 2.6	DTS/DPF 2.6
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	None are applicable.
PO 2.7	DTS/DPF 2.7
Land division results in legible street patterns connected to the surrounding street network.	None are applicable.
PO 2.8	DTS/DPF 2.8
Land division is designed to preserve existing vegetation of value including native vegetation and regulated and significant trees.	None are applicable.
Roads ar	nd Access
PO 3.1	DTS/DPF 3.1
Land division provides allotments with access to an all-weather public road.	None are applicable.
P0 3.2	DTS/DPF 3.2
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3
Land division does not impede access to publicly owned open space and/or recreation facilities.	None are applicable.
P0 3.4	DTS/DPF 3.4
Road reserves provide for safe and convenient movement and parking of projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles.	None are applicable.
PO 3.5	DTS/DPF 3.5
Road reserves are designed to accommodate pedestrian and cycling infrastructure, street tree planting, landscaping and street furniture.	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
PO 3.6	DTS/DPF 3.6
Road reserves accommodate stormwater drainage and public utilities.	None are applicable.
PO 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.9	DTS/DPF 3.9
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
PO 3.10	DTS/DPF 3.10
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.
Infrasi	ructure
P0 4.1	DTS/DPF 4.1
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.
PO 4.2	DTS/DPF 4.2
Waste water, sewage and other effluent is capable of being disposed of from each allotment without risk to public health or the environment.	(a) a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment or (b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.
PO 4.3	DTS/DPF 4.3
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.
PO 4.4	DTS/DPF 4.4
Constructed wetland systems, including associated detention and retention basins, are sited and designed to ensure public health and safety is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	None are applicable.
PO 4.5	DTS/DPF 4.5
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.
PO 4.6	DTS/DPF 4.6
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.
Minor Land Division	(Under 20 Allotments)
Open	Space
PO 5.1	DTS/DPF 5.1
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.
Solar Or	ientation

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
P0 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
Water Sen:	sitive Design
P0 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
P0 7.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Battle-Axe	Development Development
PO 8.1	DTS/DPF 8.1
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.
PO 8.2	DTS/DPF 8.2
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:
	(a) has a minimum width of 4m
	or (b) where more than 3 allotments are proposed, a minimum width of 5.5m.
PO 8.3	DTS/DPF 8.3
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.
PO 8.4	DTS/DPF 8.4
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b):
	(a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Major Land Division	on (20+ Allotments)
Open	Space
PO 9.1	DTS/DPF 9.1
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.
PO 9.2	DTS/DPF 9.2
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.
PO 9.3	DTS/DPF 9.3
Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	None are applicable.
Water Sen:	sitive Design
PO 10.1	DTS/DPF 10.1
Land division creating 20 or more allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
PO 10.2	DTS/DPF 10.2

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024	
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
Solar Orientation		
P0 11.1	DTS/DPF 11.1	
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	None are applicable.	

Marinas and On-Water Structures

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation	and Safety
P0 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and on-water structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and on-water structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
PO 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the operation or function of a water supply pumping station.	On-water structures are set back: (a) 3km or more from upstream water supply pumping station take-off points (b) 500m or more from downstream water supply pumping station take-off points.
PO 1.6	DTS/DPF 1.6

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmen	ntal Protection
PO 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.

Open Space and Recreation

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
DO 1	Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use	and Intensity
P0 1.1	DTS/DPF 1.1
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.
PO 1.2	DTS/DPF 1.2
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.
Design	and Siting
P0 2.1	DTS/DPF 2.1
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.
PO 2.2	DTS/DPF 2.2
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.
P0 2.3	DTS/DPF 2.3
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.
Pedestrians and Cyclists	
PO 3.1	DTS/DPF 3.1
Open space incorporates:	None are applicable.
(a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes;	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
(b) safe crossing points where pedestrian routes intersect the road network;	
(c) easily identified access points.	
Usa	l bility
PO 4.1	DTS/DPF 4.1
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.
	I d Security
P0 5.1	DTS/DPF 5.1
Open space is overlooked by housing, commercial or other development to provide casual surveillance where possible.	None are applicable.
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.
PO 5.3	DTS/DPF 5.3
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
PO 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to	None are applicable.
minimise potential entrapment.	
PO 5.5	DTS/DPF 5.5
Adequate lighting is provided around toilets, telephones, seating, litter bins, bicycle storage, car parks and other such facilities.	None are applicable.
PO 5.6	DTS/DPF 5.6
Pedestrian and bicycle movement after dark is focused along clearly defined, adequately lit routes with observable entries and exits.	None are applicable.
Sig	I nage
PO 6.1	DTS/DPF 6.1
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	None are applicable.
Buildings ar	nd Structures
PO 7.1	DTS/DPF 7.1
Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	None are applicable.
P0 7.2	DTS/DPF 7.2
Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	None are applicable.
P07.3	DTS/DPF 7.3
Development in open space is constructed to minimise the extent of impervious surfaces.	None are applicable.
PO 7.4	DTS/DPF 7.4
Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	None are applicable.
Lands	caping
PO 8.1	DTS/DPF 8.1
Open space and recreation facilities provide for the planting and retention of large trees and vegetation.	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
PO 8.2	DTS/DPF 8.2
Landscaping in open space and recreation facilities provides shade and windbreaks: (a) along cyclist and pedestrian routes; (b) around picnic and barbecue areas; (c) in car parking areas.	None are applicable.
PO 8.3 Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	DTS/DPF 8.3 None are applicable.
PO 8.4 Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	DTS/DPF 8.4 None are applicable.

Out of Activity Centre Development

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
	The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a range of
	shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.

Performance Outcomes and Deemed to Satisfy / Designated Performance Outcome Criteria

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	sidential development outside Activity Centres of a scale and type that	DTS/DPF 1.1 None are applicable.
	ot diminish the role of Activity Centres:	
(a)	as primary locations for shopping, administrative, cultural, entertainment and community services	
(b)	as a focus for regular social and business gatherings	
(c)	in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	
PO 1.2		DTS/DPF 1.2
Out-of-	activity centre non-residential development complements Activity	None are applicable.
Centre	s through the provision of services and facilities:	
(a)	that support the needs of local residents and workers, particularly in underserviced locations	
(b)	at the edge of Activities Centres where they cannot readily be accommodated within an existing Activity Centre to expand the range of services on offer and support the role of the Activity Centre.	

Resource Extraction

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	nd Intensity
P0 1.1	DTS/DPF 1.1
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.
P0 1.2	DTS/DPF 1.2
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.
Water	Quality
PO 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments,	Buffers and Landscaping
P0 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
P0 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

Site Contamination

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome	
DO 1	Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria /
---------------------	------------------------------

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	Designated Performance Feature
P0 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d):
	(a) does not involve a change in the use of land
	(b) involves a change in the use of land that does not constitute a change to a more sensitive use
	(c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form)
	(d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following:
	(i) a site contamination audit report has been prepared under Part 10A of the <i>Environment Protection Act 1993</i> in relation to the land within the previous 5 years which states that-
	A. site contamination does not exist (or no longer exists) at the land
	or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation)
	or C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)
	and (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Tourism Development

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
General		
P0 1.1	DTS/DPF 1.1	
Tourism development complements and contributes to local, natural, cultural or historical context where:	None are applicable.	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
(a) it supports immersive natural experiences	
(b) it showcases South Australia's landscapes and produce	
(c) its events and functions are connected to local food, wine and nature.	
P0 1.2	DTS/DPF 1.2
	None are applicable.
any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	
Infilinise environmental and contextual impact.	
Caravan and T	Tourist Parks
P0 2.1	DTS/DPF 2.1
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.
PO 2.2	DTS/DPF 2.2
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.
P0 2.3	DTS/DPF 2.3
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.
PO 2.4	DTS/DPF 2.4
Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.
PO 2.5	DTS/DPF 2.5
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development.	None are applicable.
PO 2.6	DTS/DPF 2.6
Long-term occupation does not displace tourist accommodation, particularly in important tourist destinations such as coastal and riverine locations.	None are applicable.
Tourist accommodation in areas constituted u	under the National Parks and Wildlife Act 1972
P0 3.1	DTS/DPF 3.1
,	None are applicable.
such as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation	
lost through bushfire).	
PO 3.2	DTS/DPF 3.2
	None are applicable.
to the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	попе аге аррпсаше.
PO 3.3	DTS/DPF 3.3
Tourist accommodation and recreational facilities, including associated	None are applicable.
access ways and ancillary structures, are located on cleared (other than where	•
cleared as a result of bushfire) or degraded areas or where environmental improvements can be achieved.	
PO 3.4	DTS/DPF 3.4
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.
(a) comprising a minimum of 10 accommodation units	
(b) clustering separated individual accommodation units	
(c) being of a size unsuitable for a private dwelling (d) ensuring functional areas that are generally associated with a private	
dwelling such as kitchens and laundries are excluded from, or	
physically separated from individual accommodation units, or are of a size unsuitable for a private dwelling.	
size unsultable for a private dwelling.	

Transport, Access and Parking

Assessment Provisions (AP)

Desired Outcome (DO)

Desired Outcome		
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Movemen	nt Systems
P0 1.1	DTS/DPF 1.1
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.
P0 1.2	DTS/DPF 1.2
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.
P0 1.3	DTS/DPF 1.3
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.
P0 1.4	DTS/DPF 1.4
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.
Sigh	ıttines
P0 2.1	DTS/DPF 2.1
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.
P0 2.2	DTS/DPF 2.2
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.
Vehicle	Access
PO 3.1	DTS/DPF 3.1
Safe and convenient access minimises impact or interruption on the operation of public roads.	The access is: (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	(b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.
PO 3.2 Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	DTS/DPF 3.2 None are applicable.
PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	DTS/DPF 3.3 None are applicable.
P0 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	DTS/DPF 3.4 None are applicable.
PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
P0 3.6 Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	DTS/DPF 3.6 Driveways and access points: (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.
PO 3.7 Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	DTS/DPF 3.7 Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.
PO 3.8 Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	DTS/DPF 3.8 None are applicable.
PO 3.9 Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	DTS/DPF 3.9 None are applicable.
Access for People	le with Disabilities

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
PO 4.1	DTS/DPF 4.1
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	None are applicable.
Vehicle Pa	I arking Rates
PO 5.1	DTS/DPF 5.1
Sufficient on-site vehicle parking and specifically marked accessible car parking places are provided to meet the needs of the development or land use having regard to factors that may support a reduced on-site rate such as:	Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant:
 (a) availability of on-street car parking (b) shared use of other parking areas (c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of vehicle parking may be shared (d) the adaptive reuse of a State or Local Heritage Place. 	 (a) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas if the development is a class of development listed in Table 2 and the site is in a Designated Area (b) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements where (a) does not apply (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
Vehicle Pa	rking Areas
PO 6.1	DTS/DPF 6.1
Vehicle parking areas are sited and designed to minimise impact on the operation of public roads by avoiding the use of public roads when moving from one part of a parking area to another.	Movement between vehicle parking areas within the site can occur without the need to use a public road.
P0 6.2	DTS/DPF 6.2
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.	None are applicable.
PO 6.3	DTS/DPF 6.3
Vehicle parking areas are designed to provide opportunity for integration and shared-use of adjacent car parking areas to reduce the total extent of vehicle parking areas and access points.	None are applicable.
PO 6.4	DTS/DPF 6.4
Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	None are applicable.
PO 6.5	DTS/DPF 6.5
Vehicle parking areas that are likely to be used during non-daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.
P0 6.6	DTS/DPF 6.6
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.
P0 6.7	DTS/DPF 6.7
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.
Undercroft and Below Ground G	Garaging and Parking of Vehicles
P0 7.1	DTS/DPF 7.1
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.
Internal Roads and Parking Areas in Resid	lential Parks and Caravan and Tourist Parks
PO 8.1	DTS/DPF 8.1
Internal road and vehicle parking areas are surfaced to prevent dust becoming	None are applicable.

Policy24	P&D Code (in effect) Version 2024.7 18/04/202
a nuisance to park residents and occupants.	
P0 8.2	DTS/DPF 8.2
Traffic circulation and movement within the park is pedestrian friendly and promotes low speed vehicle movement.	None are applicable.
Bicycle Parking ir	I n Designated Areas
20 9.1	DTS/DPF 9.1
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.
20 9.2	DTS/DPF 9.2
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.
PO 9.3	DTS/DPF 9.3
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.
Corner	Cut-Offs
P0 10.1	DTS/DPF 10.1
Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram:
	Corner Cut- Off Area 4.5M Road Reserve
Heavy Veh	icle Parking
P0 11.1	DTS/DPF 11.1
Heavy vehicle parking and access is designed and sited so that the activity does not result in nuisance to adjoining neighbours as a result of dust, fumes, vibration, odour or potentially hazardous loads.	Heavy vehicle parking occurs in accordance with the following: (a) the site is not located within a Neighbourhood-type zone (except a Rural Living Zone) (b) the site is a minimum of 0.4 ha (c) where the site is 2 ha or more, no more than 2 vehicles exceeding 3,000 kilograms each (and trailers) are to be parked on the allotment at any time
	(d) where the site is between 0.4 ha and 2 ha, only one vehicle exceeding 3,000 kilograms (and one trailer) are to be parking on the allotment a

- (9) where the site is between 0.4 ha and 2 ha, only one vehicle exceeding 3,000 kilograms (and one trailer) are to be parking on the allotment at any time
- (e) the vehicle parking area achieves the following setbacks:
 - (i) behind the building line or 30m, whichever is greater
 - (ii) 20m from the secondary street if it is a State Maintained Road $\,$
 - (iii) 10m from the secondary street if it is a local road
 - (iv) 10m from side and rear boundaries
- parking and access areas (including internal driveways) should be sealed or have a surface that can be treated and maintained to minimise dust and mud nuisance
- (g) does not include refrigerated trailers or vehicles
- (h) vehicles only enter and exit the property in accordance with the following hours:
 - (i) Monday to Saturday 6:00am and 9:30pm
 - (ii) Sunday and public holidays between 9:30 am and 7:00 pm

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	(i) the handling or trans-shipment of freight is not carried out on the property.
PO 11.2	DTS/DPF 11.2
Heavy vehicle parking ensures that vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	Heavy vehicles: (a) can enter and exit the site in a forward direction; and (b) operate within the statutory mass and dimension limited for General Access Vehicles (as prescribed by the National Heavy Vehicle Regulator).
PO 11.3 Heavy vehicle parking is screened through siting behind buildings, screening, landscaping or the like to obscure views from adjoining properties and public roads.	DTS/DPF 11.3 None are applicable.

Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards)
	Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for
	each development type.
Residential	Development
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) -2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Support	ed Accommodation
Retirement facility	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
Companied	0.2 spaces per dwelling for visitor parking. 0.3 spaces per bed.
Supported accommodation Residential De	velopment (Other)
Ancillary accommodation	
Anomary accommodation	No additional requirements beyond those associated with the main dwelling.
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Student accommodation	0.3 spaces per bed.
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.
	purist
Caravan and tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.
Tourist accommodation other than a caravan and tourist park	1 car parking space per accommodation unit / guest room.
Comm	ercial Uses
Auction room/ depot	1 space per 100m2 of building floor area plus an additional 2 spaces.
Automotive collision repair	3 spaces per service bay.
Motor repair station Office	3 spaces per service bay.
	For a call centre, 8 spaces per 100m2 of gross leasable floor area
	In all other cases, 4 spaces per 100m2 of gross leasable floor area.
Retail fuel outlet	3 spaces per 100m2 gross leasable floor area.
Service trade premises	2.5 spaces per 100m2 of gross leasable floor area
	1 space per 100m2 of outdoor area used for display purposes.
Shop (no commercial kitchen)	5.5 spaces per 100m2 of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
	5 spaces per 100m2 of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m2 of gross leasable floor area.
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.
	Premises with take-away service but with no seats - 12 spaces per 100m2 of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
Community	and Civic Uses
Community facility	For a library, 4 spaces per 100m2 of total floor area.
	For a hall/meeting hall, 0.2 spaces per seat.

	In all other cases, 10 spaces per 100m2 of total floor area.
Educational facility	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.
Place of worship	1 space for every 3 visitor seats.
Child care facility	For a child care centre, 0.25 spaces per child
	In all other cases, 1 per employee plus 0.25 per child (drop off/pick up bays).
	Health Related Uses
Consulting room	4 spaces per consulting room excluding ancillary facilities.
Hospital	4.5 spaces per bed for a public hospital.
	1.5 spaces per bed for a private hospital.
	Recreational and Entertainment Uses
Cinema complex	0.2 spaces per seat.
Concert hall / theatre	0.2 spaces per seat.
Hotel	1 space for every 2m2 of total floor area in a public bar plus 1 space for every 6m2 of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.
Indoor recreation facility	6.5 spaces per 100m2 of total floor area for a Fitness Centre
	4.5 spaces per 100m2 of total floor area for all other Indoor recreation facilities.
	Industry/Employment Uses
Fuel depot	1.5 spaces per 100m2 total floor area
	1 spaces per 100m2 of outdoor area used for fuel depot activity purposes.
Industry	1.5 spaces per 100m2 of total floor area.
Store	0.5 spaces per 100m2 of total floor area.
Timber yard	1.5 spaces per 100m2 of total floor area
	1 space per 100m2 of outdoor area used for display purposes.
Warehouse	0.5 spaces per 100m2 total floor area.
	Other Uses
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
Radio or Television Station	5 spaces per 100m2 of total building floor area.

P&D Code (in effect) Version 2024.7 18/04/2024

Table 2 - Off-Street Car Parking Requirements in Designated Areas

Policy24

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column.

Class of	Car Park	king Rate	Designated Areas
Development			
	Where a developme	ent comprises more	
	than one developm	nent type, then the	
	overall car parking rate will be taken to		
	be the sum of the car parking rates for		
	each development type.		
	Minimum number	Maximum number	
	of spaces	of spaces	

Policy24 P&D Code (in effect) Version 2024.7 18/04/20			
Development generally			
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept	Capital City Zone
		Plan, where the maximum is:	City Main Street Zone
		1 space for each dwelling with a total floor area less than 75 square metres	City Riverbank Zone
			Adelaide Park Lands Zone
		2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres	Business Neighbourhood Zone (within the City of Adelaide)
		3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a multi-storey building: 1 visitor space for each 6 dwellings.	The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
	Non-residentia	al development	
Non-residential development	3 spaces per 100m2 of gross	5 spaces per 100m2 of gross	
excluding tourist accommodation	leasable floor area.	leasable floor area.	City Living Zone
			Urban Corridor (Boulevard) Zone
			Urban Corridor (Business) Zone
			Urban Corridor (Living) Zone
			Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone (except for Bowden, Brompton or Hindmarsh)
Non-residential development excluding tourist accommodation	3 spaces per 100m2 of gross leasable floor area.	6 spaces per 100m2 of gross leasable floor area.	Strategic Innovation Zone in the City of Burnside, City of Marion or City of Mitcham
			Strategic Innovation Zone outside the City of Burnside, City of Marion or City of Mitcham when the site is also in a high frequency public transit area
			Suburban Activity Centre Zone when the site is also in a high frequency public transit area
			Suburban Business Zone when the site is also in a high frequency public transit area
			Business Neighbourhood Zone outside of the City of Adelaide when the site is also in a high frequency public transit area
			Suburban Main Street Zone when the site is also in a high frequency public transit area
			Urban Activity Centre Zone
Non-residential development excluding tourist accommodation	3 spaces per 100 square metres of gross leasable floor area 1.5 spaces per 100 square metres of gross leasable floor area above	3 spaces per 100 square metres of gross leasable floor area	Urban Neighbourhood Zone (in Bowden, Brompton or Hindmarsh)
	ground floor level other than for a shop		

Policy24		P&D Code (ii	n effect) Version 2024.7 18/04/2024
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4	City Living Zone
	5 bedrooms over 100 bedrooms	bedrooms over 100 bedrooms	Urban Activity Centre Zone when the site is also in a high frequency public transit area
			Urban Corridor (Boulevard) Zone
			Urban Corridor (Business) Zone
			Urban Corridor (Living) Zone
			Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone (except for Bowden, Brompton or Hindmarsh)
	Residential	development	
Residential component of a multi- storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling	None specified.	City Living Zone
Storey building	1 bedroom dwelling - 0.75 spaces per		Strategic Innovation Zone in the City
	dwelling 2 bedroom dwelling - 1 space per		of Burnside, City of Marion or City of Mitcham
	dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling		Strategic Innovation Zone outside the City of Burnside, City of Marion or City of Mitcham when the site is also in a high frequency public transit area
	0.25 spaces per dwelling for visitor parking.		Urban Activity Centre Zone when the site is also in a high frequency public transit area
			Urban Corridor (Boulevard) Zone
			Urban Corridor (Business) Zone
			Urban Corridor (Living) Zone
			Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone (except for Bowden, Brompton or Hindmarsh)
Residential component of a multi- storey building	0.75 per dwelling	None specified	Urban Neighbourhood Zone (in Bowden, Brompton or Hindmarsh)
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling	None specified.	City Living Zone
	1 bedroom dwelling - 0.75 spaces per dwelling		Urban Activity Centre Zone when the site is also in a high frequency public transit area
	2 bedroom dwelling - 1 space per dwelling		Urban Corridor (Boulevard) Zone
	3 or more bedroom dwelling - 1.25 spaces per dwelling		Urban Corridor (Business) Zone
	0.25 spaces per dwelling for visitor		Urban Corridor (Living) Zone
	parking.		Urban Corridor (Main Street) Zone
			Urban Neighbourhood Zone (except for Bowden, Brompton or Hindmarsh)
Residential flat building	0.75 per dwelling	None specified	Urban Neighbourhood Zone (in Bowden, Brompton or Hindmarsh)
Detached dwelling	0.75 per dwelling	None specified	Urban Neighbourhood Zone (in Bowden, Brompton or Hindmarsh)
Row dwelling	0.75 per dwelling	None specified	Urban Neighbourhood Zone (in Bowden, Brompton or Hindmarsh)

Policy24		P8	P&D Code (in effect) Version 2024.7 18/04/2024	
Semi-detached dwelling	0.75 per dwelling	None specified	Urban Neighbourhood Zone (in	
			Bowden, Brompton or Hindmarsh)	

Table 3 - Off-Street Bicycle Parking Requirements

 $The \ bicycle \ parking \ rates \ apply \ within \ designated \ areas \ located \ within \ parts \ of \ the \ State \ identified \ in \ the \ Schedule \ to \ Table \ 3.$

Class of	Bicycle Parking Rate		
Development			
	Where a development comprises more than one development		
	type, then the overall bicycle parking rate will be taken to be the		
	sum of the bicycle parking rates for each development type.		
Consulting room	1 space per 20 employees plus 1 space per 20 consultir	g rooms for customers.	
Educational facility	For a secondary school - 1 space per 20 full-time time er visitors. For tertiary education - 1 space per 20 employees plus 1	nployees plus 10 percent of the total number of employee spaces for space per 10 full time students.	
Hospital	1 space per 15 beds plus 1 space per 30 beds for visitor		
Indoor recreation facility	1 space per 4 employees plus 1 space per 200m2 of gro		
Licensed Premises		oor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 per 60 square metres dining floor area, plus 1 per 40 square metres	
Office	visitors.	us 2 spaces plus 1 space per 1000m2 of gross leasable floor area for	
Child care facility	1 space per 20 full time employees plus 1 space per 40 f	ull time children.	
Recreation area	1 per 1500 spectator seats for employees plus 1 per 25	O visitor and customers.	
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.		
Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.		
Shop		is 1 space for every 600m2 of gross leasable floor area for customers.	
Tourist accommodation	1 space for every 20 employees plus 2 for the first 40 ro	oms and 1 for every additional 40 rooms for visitors.	
Schedule to Table 3	Designated Area	Relevant part of the State	
		The bicycle parking rate applies to a designated area located in a relevant part of the State described below.	
	All zones	City of Adelaide	
	Business Neighbourhood Zone	Metropolitan Adelaide	
	Strategic Innovation Zone		
	Suburban Activity Centre Zone		
	Suburban Business Zone		
	Suburban Main Street Zone		
	Urban Activity Centre Zone		
	Urban Corridor (Boulevard) Zone		
	Urban Corridor (Business) Zone		
	Urban Corridor (Living) Zone		
	Urban Corridor (Main Street) Zone		
	Urban Neighbourhood Zone		

Waste Treatment and Management Facilities

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Si	ting
P01.1	DTS/DPF 1.1
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate off-site impacts from noise, air and dust emissions.	None are applicable.
Soil and Wa	ter Protection
PO 2.1	DTS/DPF 2.1
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as: (a) containing potential groundwater and surface water contaminants within waste operations areas (b) diverting clean stormwater away from waste operations areas and potentially contaminated areas (c) providing a leachate barrier between waste operations areas and	None are applicable.
underlying soil and groundwater. P0 2.2 Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	DTS/DPF 2.2 Wastewater lagoons are set back 50m or more from watercourse banks.
environmental nami and adverse effects on water resources.	
P0 2.3 Wastewater lagoons are designed and sited to:	DTS/DPF 2.3 None are applicable.
 (a) avoid intersecting underground waters; (b) avoid inundation by flood waters; (c) ensure lagoon contents do not overflow; (d) include a liner designed to prevent leakage. 	
PO 2.4	DTS/DPF 2.4
Waste operations areas of landfills and organic waste processing facilities are set back from watercourses to minimise adverse impacts on water resources.	Waste operations areas are set back 100m or more from watercourse banks.
Am	enity
PO 3.1	DTS/DPF 3.1

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024	
Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity.	None are applicable.	
P0 3.2	DTS/DPF 3.2	
Access routes to waste treatment and management facilities via residential streets is avoided.	None are applicable.	
P0 3.3	DTS/DPF 3.3	
Litter control measures minimise the incidence of windblown litter.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation.	None are applicable.	
Acc	ess	
PO 4.1	DTS/DPF 4.1	
Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction.	None are applicable.	
PO 4.2	DTS/DPF 4.2	
Suitable access for emergency vehicles is provided to and within waste treatment or management sites.	None are applicable.	
Fencing a	nd Security	
PO 5.1	DTS/DPF 5.1	
Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public.	Chain wire mesh or pre-coated painted metal fencing 2m or more in height is erected along the perimeter of the waste treatment or waste management facility site.	
Lar	ndfill	
P0 6.1	DTS/DPF 6.1	
Landfill gas emissions are managed in an environmentally acceptable manner.	None are applicable.	
PO 6.2	DTS/DPF 6.2	
Landfill facilities are separated from areas of environmental significance and land used for public recreation and enjoyment.	Landfill facilities are set back 250m or more from a public open space reserve, forest reserve, national park or Conservation Zone.	
PO 6.3	DTS/DPF 6.3	
Landfill facilities are located on land that is not subject to land slip.	None are applicable.	
PO 6.4	DTS/DPF 6.4	
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in a 1% AEP flood event.	
Organic Waste Processing Facilities		
P0 7.1	DTS/DPF 7.1	
Organic waste processing facilities are separated from the coast to avoid potential environment harm.	Organic waste processing facilities are set back 500m or more from the coastal high water mark.	
P0 7.2	DTS/DPF 7.2	
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect.	None are applicable.	
P0 7.3	DTS/DPF 7.3	
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.	
P0 7.4	DTS/DPF 7.4	
Organic waste processing facilities are located on land that is not subject to	None are applicable.	

Policy24	P&D Code (in effect) Version 2024.7 18/04/2024
land slip.	
P0 7.5	DTS/DPF 7.5
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Major Wastewater	Treatment Facilities
PO 8.1	DTS/DPF 8.1
Major wastewater treatment and disposal systems, including lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	None are applicable.
PO 8.2	DTS/DPF 8.2
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	1

Workers' accommodation and Settlements

Assessment Provisions (AP)

Desired Outcome (DO)

	Desired Outcome
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
P0 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
P0 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
P0 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
P0 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

No criteria applies to this land use. Please check the definition of the land use for further detail.